




A. Kähne Bootsausstatter[®] *TEXTILE EQUIPMENT*

Catalog 2021

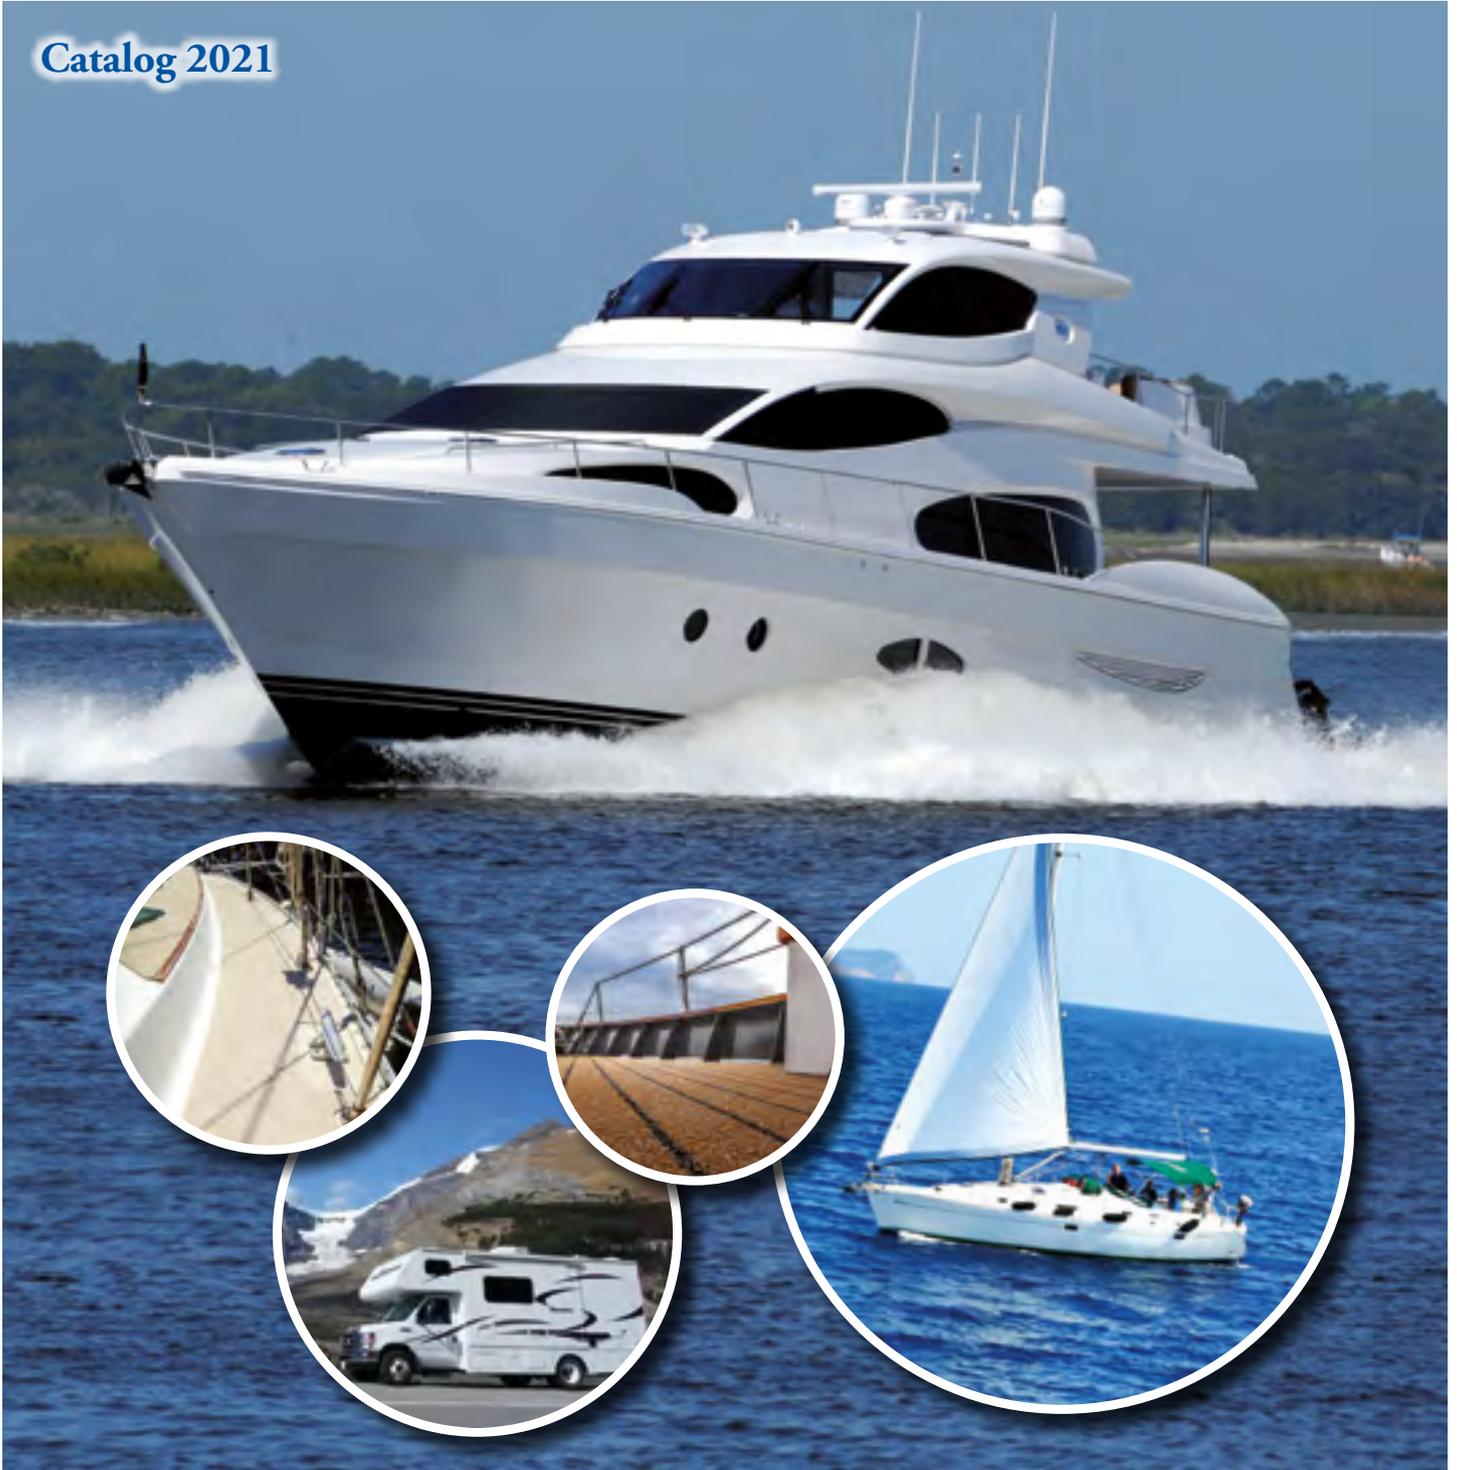

Textile equipment for boats, yachts, caravans - outdoor and indoor flooring,
deck coverings, wall coverings, upholstery fabrics, accessories

36 years of experience

ART-Deluxe

ART-Deluxe is a unique, stylish and durable indoor and outdoor carpet. The flooring is made of high quality materials and has a maritime look. **ART-Deluxe** is soft and comfortable, nevertheless hard-wearing and water-permeable. The boat carpet can be laid loosely, glued with PU glue or fastened with snaps.

Areas of application:

Boat, yacht and ship equipment, swimming pools, caravans, objects, Business and show-rooms.

Properties

- lightfast ISO 105 - B02
- salt water resistant
- chlorine resistant
- flame retardant ISO 9239.1

Composition

- Polypropylene with Aquabac, velor fabric
- 100 % waterproof dyed fibers
- Total weight / m² approx. 1.400 g

Dimensions

- Total thickness approx. 9,0 mm
 - Bar widths approx. 5,0 cm
 - Width of goods approx. 200 cm
- All colors with stripes (4100, 4105, 4110, 4115, 4090, 4143, 41145, 4095, 4080, 4085 and 4130) are also available in a width of 395 cm.
- Delivery from 1 running meter

Cleaning

The boat carpet can be wet or dry getting cleaned.



Cutting, stitching and edging service



ART-Deluxe – Colors



*Received upon request
you original pattern.*



INFINITY

INFINITY is a luxurious woven vinyl flooring. This has proven itself for years in yacht and ship equipment as a hard-wearing floor covering. With the patented back system, the marine floor has been completely redefined. **INFINITY** lies by itself thanks to its non-slip underside, but it can be glued or fastened with press studs. The cut is simply done with scissors. The material does not fray and can also be edged with UV-resistant tape. **INFINITY** is flexible enough to cover curves.

Areas of application:

Yachts, boats, objects, swimming pools, terraces.

Properties

- salt water resistant
- UV stable
- non-slip
- flame retardant MVSS302
- sound absorbing
- stain and mold resistant
- dimensionally stable
- antimicrobial
- lead and phthalate free
- 100 % recyclable

Composition

- 100 % PVC - woven vinyl surface
- Vinyl back
- Total weight / m² approx. 1.300 g




Cleaning

The soil can be wet or dry with commercially available cleaning agents be cleaned with agents.








Dimensions

- Total thickness approx. 3 mm
- Bar width approx. 8 cm
- Width of goods approx. 300 cm and approx. 150 cm
- Delivery from 1 running meter

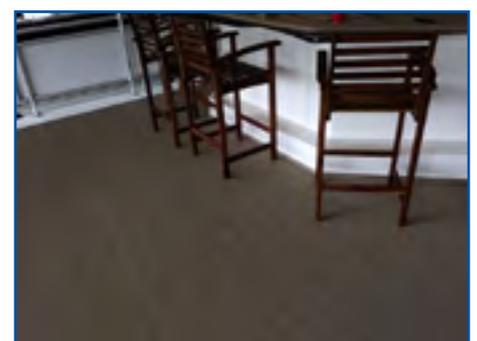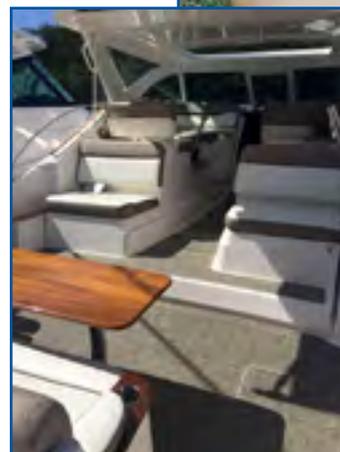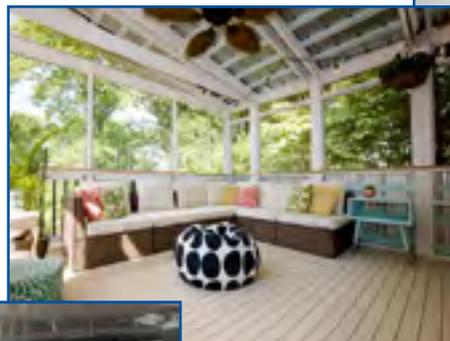



*Received upon request
you original pattern.*

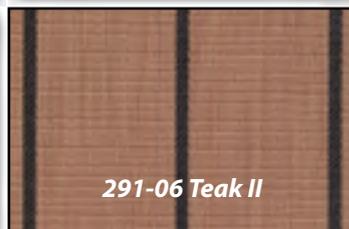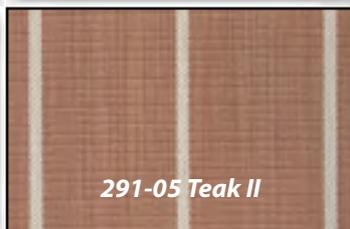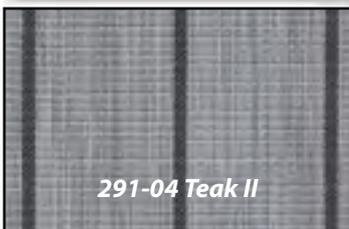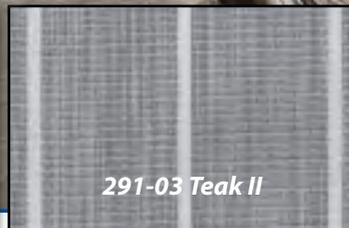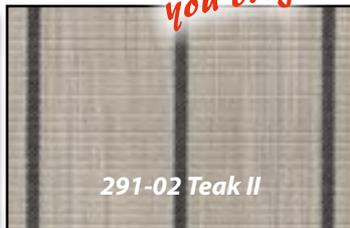

SPECTROPILE

SPECTROPILE is a fully synthetic marine carpeted floor. Due to the completely dyed material, the **SPECTROPILE** carpet is UV-stable and extremely hard-wearing. The soft and supple surface conveys a comfortable walking feeling and thus creates a feeling of well-being. The cut is simply done with scissors, the cut itself is clean and does not fray.

For indoor bonding, we recommend our UNI-Glue140 and for outdoor use a PU adhesive. It is essential to secure the carpet from slipping using glue or buttons.

Areas of application:

Boat, yacht and shipbuilding, leisure and home, caravan and vehicle equipment

Properties


- Mold and dirt repellent
- salt water resistant
- flame retardant (MVSS 302)
- UV-stable grade 7
- cut edge resistant

Composition

- Material 100 % polyester
- Total weight / m² approx. 542 g

Dimensions

- Total thickness approx. 6,5 mm
- Width of goods approx. 183 cm
- Roll length approx. 55 m
- Delivery from 1 running meter

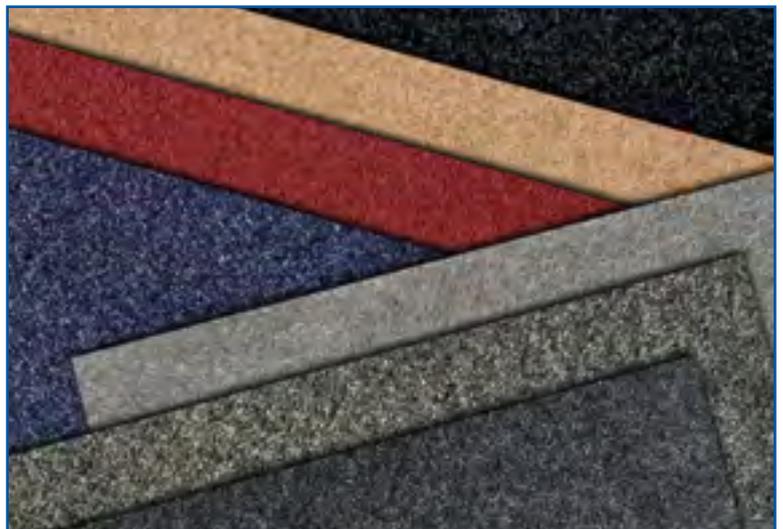


Cleaning

The cleaning is done simply by sweeping, vacuum off, in the case of heavier soiling by brushing off or hosing down.



42-H27 Caramel

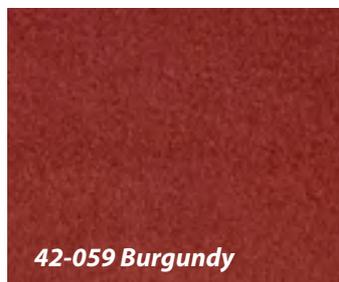

42-059 Burgundy




42-931 Grey



42-933 Anthrazit



42-H86 Graphit

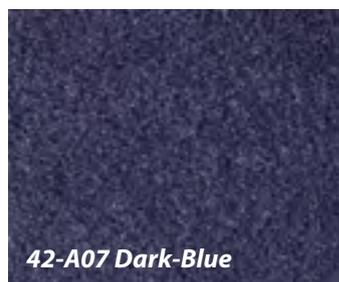

42-A07 Dark-Blue



42-938 Black

SUN

With SUN you get a fully synthetic boat carpet. Due to the completely dyed material, the SUN carpet is UV-stable and extremely hard-wearing. The robust surface is designed for heavy use. The cut is made with scissors or a carpet knife, the cut itself is clean and does not fray. For indoor bonding, we recommend our UNI adhesive 140 and for outdoor use a PU adhesive.

Areas of application:

Boat, yacht and shipbuilding, home, caravan and vehicle equipment

Properties

- Mold and dirt repellent
- salt water resistant
- flame retardant (MVSS 302)
- UV-stable grade 7
- cut edge resistant

Composition


- Material 100 % polypropylene (PP)
- Total weight / m² approx. 820 g

Dimensions


- Total thickness approx. 6,0 mm
- Width of goods approx. 200 cm
- Roll length approx. 30 m
- Delivery from 1 running meter

Cleaning

The cleaning is done simply by sweeping, vacuuming, with heavier soiling by brushing or hosing down.

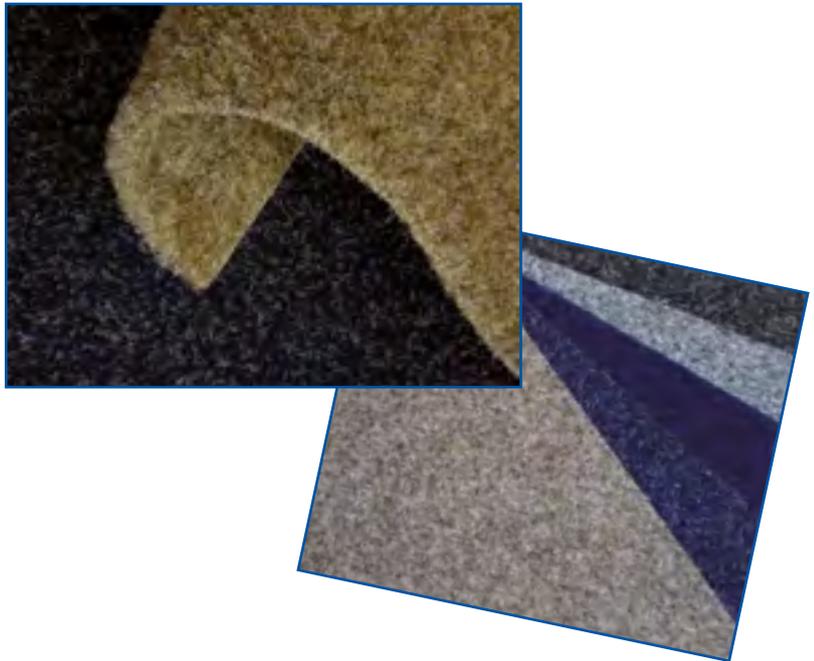

4460 beige

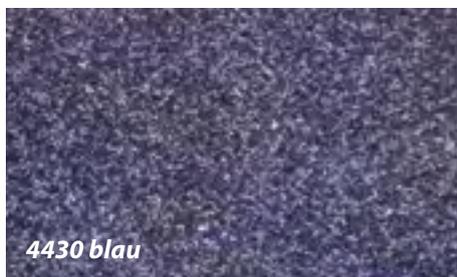

4430 blau



4432 marine



4473 grau



4455 lava

*Received upon request
you original pattern.*

Tufted artificial turf

POLI-DECK Classic

The artificial turf **POLI-DECK Classic** is a comfortable boat carpet, deck covering or floor covering. Made from UV-stabilized synthetic fibers of the highest quality. **POLI-DECK Classic** can withstand most elements encountered when used in shipping or on patios, including sunlight and moisture.

The **POLI-DECK Classic** artificial turf can be laid loosely or glued.

We are happy to cut your carpet to size according to your specifications and border it with UV-resistant object tape and, if necessary, provide it with snaps.

Areas of application:

Boat, yacht and ship equipment, swimming pools, terraces.

Properties

- UV-stable according to DIN 53387 standard (6.000 hours)
- colourfast
- water permeable 60 liters / minute / m²
- weatherproof, winterproof
- normally flammable according to DIN 4102, B2
- noise reducing
- hard-wearing and resistant
- easy to lay
- pet friendly
- environmentally friendly, free of lead and cadmium

Dimensions

- Stripe width approx. 16 cm
- Goods width approx. 200 cm, 400 cm on request
- Delivery from 1 running meter

Composition

- Pile material: 100 % PP fibrillated, crimped (UV stabilized)
- Carrier: 100 % PP black with fleece
- Back coating: black latex compound
- Number of stitches / m²: approx. 83.160
- Total height: approx. 7,5 mm
- Total weight / m² approx. 1.485 g



Cleaning

The cleaning is done simply by sweeping, hosing, brushing or vacuuming.



11017



Backside

*Received upon request
you original pattern.*



POLI-FIX

POLI-FIX artificial turf is extremely durable thanks to its UV resistance and also easy to care for. This is why **POLI-FIX** is ideally suited for use in boats, yachts and mobile homes as well as for terraces and balconies.

Thanks to the integrated drainage holes, water can easily drain away. **POLI-FIX** is a hard-wearing, long-lasting floor covering.

Areas of application:

Boat, yacht and ship equipment, swimming pools, terraces.

Properties

- UV stable colourfast
- permeable to water
- noise reducing
- hard-wearing and resistant
- cut edge resistant
- Fire behavior according to EN 13501-1
- easy to care for

Dimensions



- Total thickness approx. 12,5 mm
- Width of goods approx. 200 cm
- Delivery from 2 running meters

Composition

- Pile material 100 % PP - UV stabilized
- Back equipment: perforated drainage back
- Number of stitches / m² approx. 48.300
- Total weight / m² approx. 2.320 g


Cleaning

The cleaning is done simply by sweeping, hosing, brushing or vacuuming.

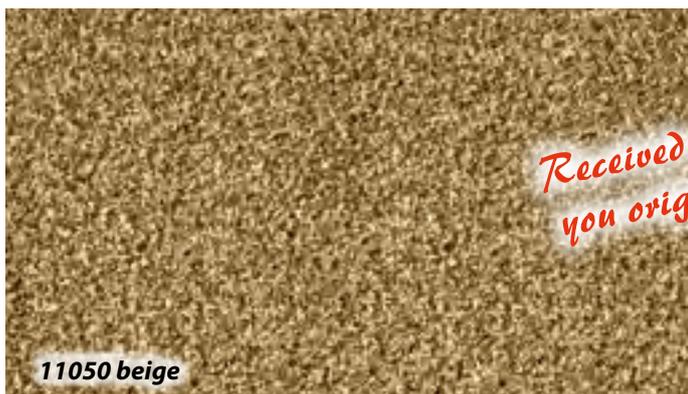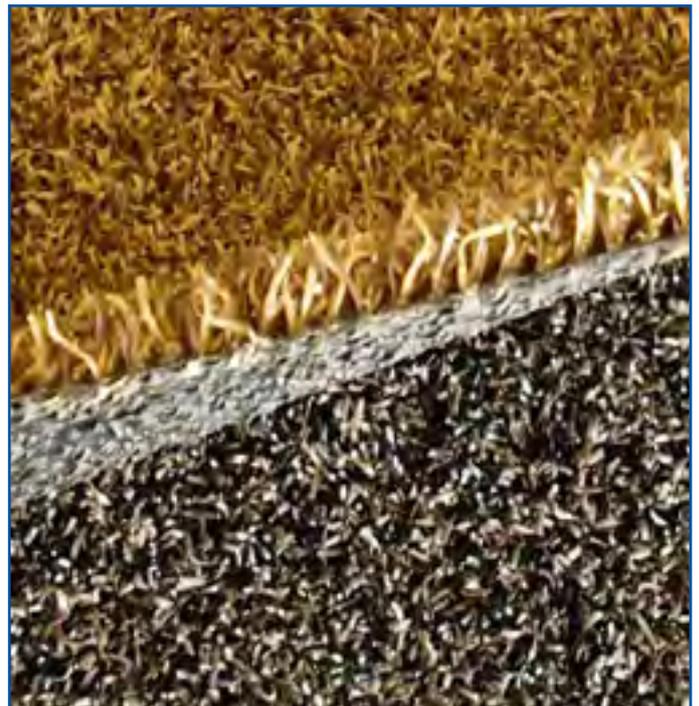

TRENDI

The **TRENDI** indoor flooring is a woven vinyl carpet with an anti-slip rubber underside. It is a modern alternative to the usual floor coverings made of „synthetic wood“, Linoleum or carpets. Thanks to its manufacturing process, **TRENDI** is absolutely impermeable to water. The warp and weft threads are thermally fixed. **TRENDI** is ideal for indoor and protected outdoor areas and is characterized by durability and lively design. If necessary, the **TRENDI** flooring can be fixed with press studs. **TRENDI** is available in 4 color variants.

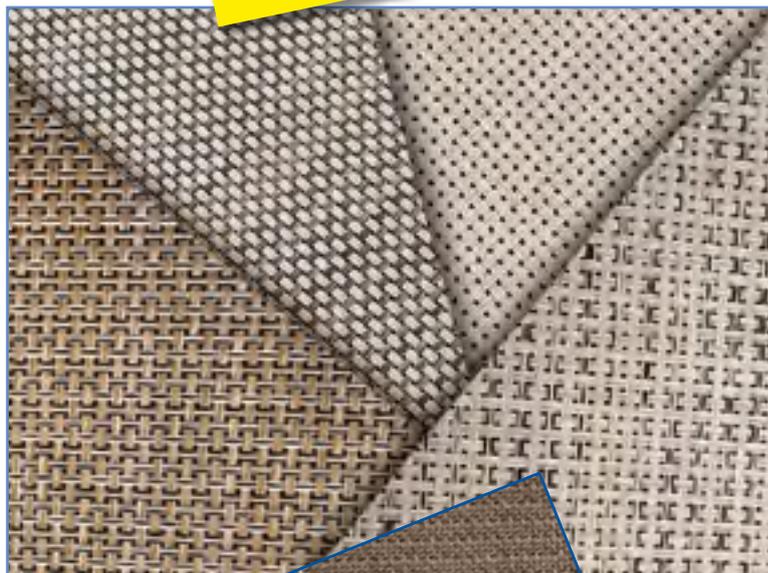

Areas of application:

Indoor and protected outdoor areas in boat and yacht building, caravan and vehicle construction as well as in living areas.

Properties


- Non-slip class R9 - DIN 51130
- UV-stable (5)
- Pressure and tear resistant, abrasion resistant
- Cut edge resistant
- Waterproof
- Suitable for underfloor heating
- Immune to rot

Composition

- Material 16 % PVC, 7 % PL, 39 % PP, 38 % TPE
- Backside non-slip rubber
- Total weight / m² approx. 1.800 g (± 6 %)

Dimensions

- Total thickness approx. 2,8 mm (± 5 %)
- Width of goods approx. 200 cm
- Roll length approx. 18 - 20 m
- Delivery from 1 running meter

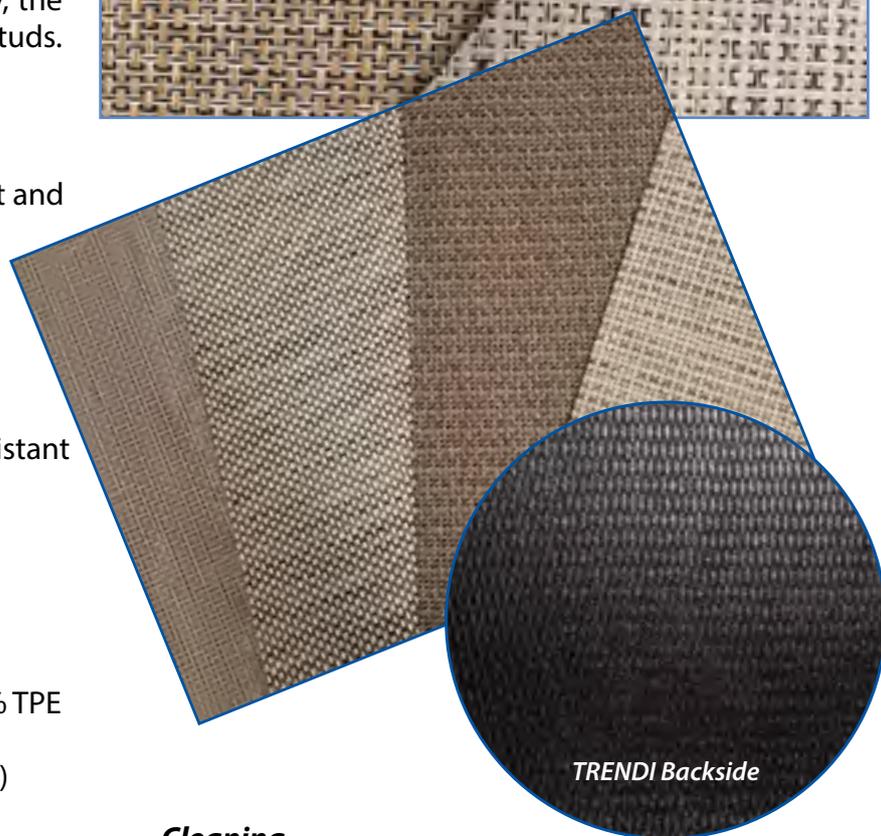

Cleaning

The cleaning is done simply with water (max. 30 ° C) and mild soap, then rinse well. Never use gasoline, solvents, chemical cleaners, or pressure washers.



*Received upon request
you original pattern.*

MILANO

Velor carpets are valued for their soft, velvety surface and their rich shading effects in ship, yacht and caravan construction. **MILANO** – with the textile backing Texback® Super, has excellent properties.

Areas of application:

Boat, yacht and shipbuilding, leisure and home, caravan and vehicle equipment.

Properties

- lightfast grade 5, ISO 105 B02
- waterfast grade 4, EN ISO 105-E01
- rub-resistant, dry grade 4, EN ISO 105-X12
- noise reducing
- flame retardant
B1 / Cfl-s1 DIN EN 13501-1
- hard-wearing and resistant
- antistatic
- fine dust tested
- tested for harmful substances
- cut edge resistant
 - therefore chainring is not necessary
 - there will be an edging on the step edges recommended

Composition


- Pile material 100 % polyamide
- Backing textile back Texback® Super
- Number of nubs / m² approx. 217.000
- Total weight / m² approx. 1.500 g

Dimensions

- Total thickness approx. 8,5 mm
- Goods width approx. 400 cm and 500 cm
- Delivery from 1 running meter

Cleaning


Dirt can be sucked off quickly and thoroughly from this quality fiber, and stains are easy to remove.

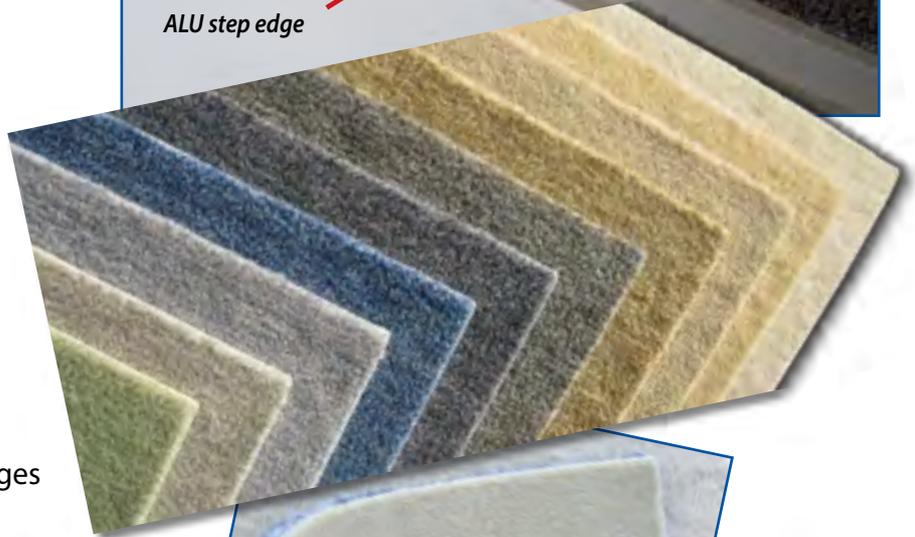

Cutting and edging service



Received upon request
you original pattern.

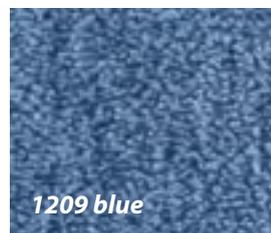

CARAT

Velor carpets are valued for their velvety surface and rich shading effects. **CARAT** – with the textile backing Texback® Super – has excellent properties. For the start we recommend ours ALU Inaugural edge rail no. 284-5.

Areas of application:

Boat, yacht and ship and vehicle construction.

Properties

- lightfast grade 5, ISO 105 BO2
- waterfast grade 4, EN ISO 105-E 01
- rub-resistant, dry grade 4, EN ISO 105-X12
- flame retardant Cfl-s1 (B1), DIN EN 13501-1
- hard-wearing and resistant
- antistatic
- fine dust tested
- tested for harmful substances

Composition

- Pile material 100 % polyamide
- Backing textile back Texback® Super
- Number of pimples / m² approx. 51.000
- Total weight / m² approx. 1.950 g

Dimensions

- Total thickness approx. 10,0 mm
- Goods width approx. 400 cm and 500 cm
- Delivery from 1 running meter

Cleaning

Stains should be pre-treated with powder or foam. The cleaning is done simply by vacuuming.



Cutting and edging service



Received upon request
you original pattern.



2301 perle




2302 beige



2303 pebbles



2304 brown

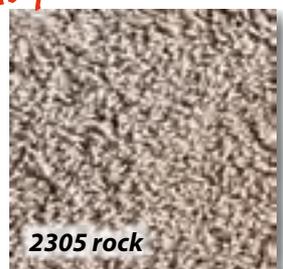


2305 rock



2306 silver



2307 grey

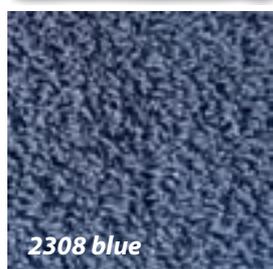

2308 blue



2309 anthracite



2310 red

Further information and the current prices can be found on our website www.kaehne-bootsausstatter.de

ROMERA

With its clear and brilliant colors, the luxury velor ROMERA is used in yachts, caravans and homes. This carpet has also proven itself in protected outdoor areas. The high-quality **ROMERA** carpeting is not only tested for harmful substances and suitable for allergy sufferers, it has a number of good properties that underline its resistance and robustness.

Areas of application:

Boat, yacht and shipbuilding, caravan.

Properties

- lightfast grade 5, ISO 105 B02
- waterfast grade 4, EN ISO 105-E01
- Rubbing fastness, dry grade 4, EN ISO 105-X12
- Impact noise and noise reducing
- flame retardant C fl - s1 (B1), DIN EN 13501-1
- antistatic
- suitable for allergy sufferers
- tested for harmful substances
- fine dust tested
- cut edge resistant
 - therefore chainring is not necessary
 - there will be an edging on the step edges recommended


Composition

- Pile material 100 % polyamide
- Backing textile backing Texback® Super
- Number of nubs / m² approx. 380.000
- Total weight / m² approx. 1.550 g

Dimensions

- Total thickness approx. 8,0 mm
- Goods width approx. 400 cm and 500 cm
- Delivery from 1 running meter

*Received upon request
you original pattern.*

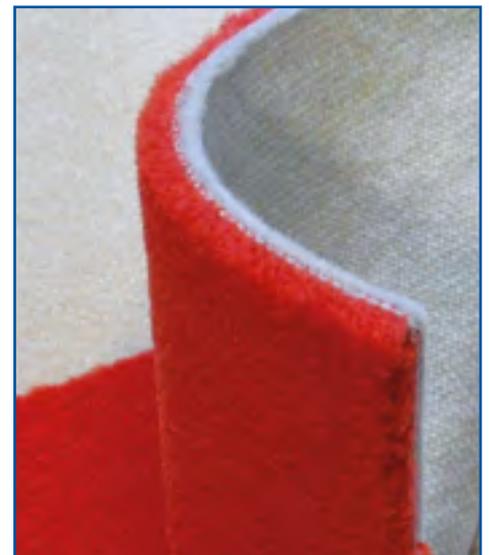

Cleaning

Easy to clean.
Brushing off,
suction or
rinse off.



FLEX-Line

With **FLEX-Line** you get a PVC covering for decorative interiors.

This inexpensive variant with a bar deck look testifies to its ease of use.

FLEX-Line is easy to lay and easy to clean. It belongs to the new generation of vinyl floorings that are made phthalate-free and can be recycled. With the 0,20 mm thick top layer, **FLEX-Line** has a tough, non-slip surface.

Areas of application:

Interiors in boat and yacht building, Caravan and vehicle construction, living areas.

Properties

- lightfast grade > 6
- non-slip R10 - DIN 51130
- flame retardant Bfl. S1 according to EN 13501-1
- antistatic and for suitable for underfloor heating
- phthalate free
- recyclable
- easy to clean

Composition


- Material 100 % PVC
- Compact back
- Total weight / m² approx. 1.690 g

Dimensions

- Total thickness approx. 2,6 mm
- Rod size approx. 50 cm x 8,3 cm
- Width of goods approx. 200 cm
When purchasing whole rolls, also available in widths of 300 cm and 400 cm
- Roll length approx. 30 m
- Delivery from 1 running meter

Cleaning

Wipe the floor weekly with warm water and a neutral pH cleaning product.

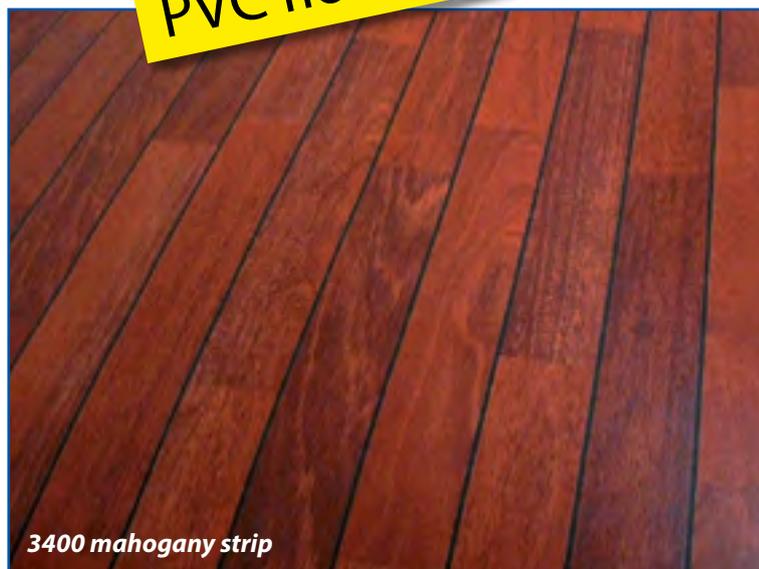

Our verbal and written advice should support your own work. They are non-binding advice - also with regard to any property rights of third parties - and do not release you from the need to conduct your own practical testing of the products for their suitability for the intended processes and purposes.

Product descriptions do not contain any statements about liability for any damage. However, should liability come into question, this is limited to the value of the goods delivered and used for all damage.

PVC flooring outdoor

ART-Line

ART-Line is a PVC floor covering with a stick deck and wood decor look for demanding indoor and roofed outdoor areas. The material is extremely non-slip, tough and abrasion-resistant. We recommend our 2-component adhesive for complete bonding.

Areas of application:

Boat, yacht and shipbuilding, objects, business and exhibition rooms, baths, swimming pools, caravan and home equipment

Properties

- waterproof
- salt water resistant
- non-slip
- resilient
- high fire class (IMO A652)
- cut edge resistant

Composition


- Upper material 100 % PVC
- Backing backing fabric
- Total weight / m² approx. 3.300 g

Dimensions

- Total thickness approx. 2 mm
- Bar width approx. 6 cm
- Width of goods approx. 180 cm
- Roll length 18 m
- Delivery from 1 running meter

Cleaning

The floor covering can be cleaned wet and dry with commercially available cleaning agents.

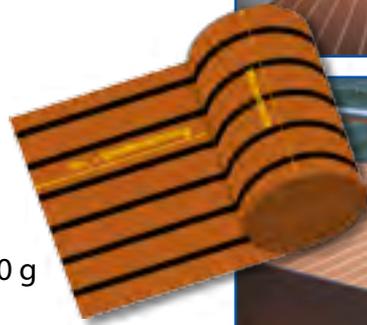

Processing

Sand the adhesive surface with sandpaper (80/100 grit). Remove sanding dust. Cut material. Cover the area to be glued with adhesive tape (masking tape) at the edges and apply adhesive (Körapur 2-component adhesive - 1 kg for approx. 2 m²). Lay in the covering, press down gently, avoiding air pockets, remove the adhesive tape. Do not enter the area for at least 24 hours. For the step edges, we recommend our **ALU rail No. 282/2**.



*Received upon request
you original pattern.*



ART-Line UNI

ART-Line UNI is a PVC flooring for demanding indoor and roofed outdoor areas. The material is identical in its properties to ART-Line, but impresses with its surface structure and natural colors. We recommend our 2-component adhesive for complete bonding.

Areas of application:

Boat, yacht and shipbuilding, objects, business and exhibition rooms, baths, swimming pools, caravan and home equipment

Properties


- waterproof
- salt water resistant
- non-slip
- resilient
- high fire class (IMO A652)
- cut edge resistant

Composition

- Upper material 100 % PVC
- Backing backing fabric
- Total weight approx. 3.300 g/m²

Cleaning

The floor covering can be cleaned wet and dry with commercially available cleaning agents.

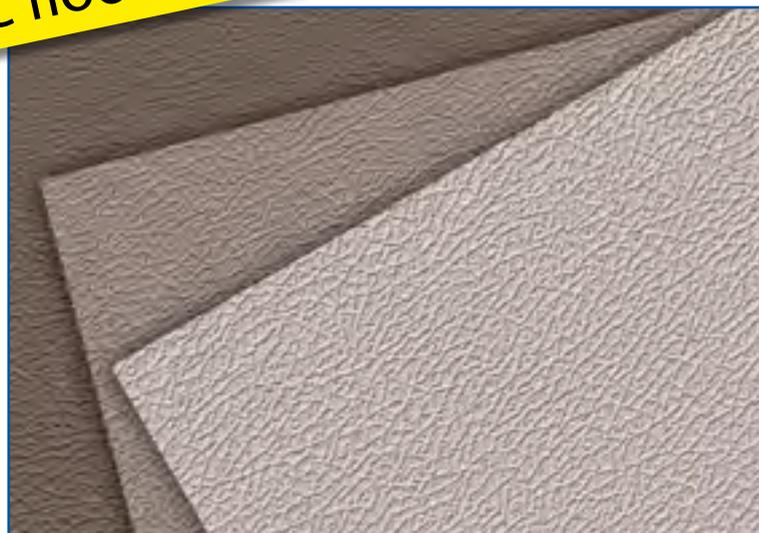


Dimensions

- Thickness approx. 2 mm
- Width of goods approx. 259 cm
- Roll length 18 m
- Delivery from 1 running meter

Processing

Sand the adhesive surface with sandpaper (80/100 grit). Remove sanding dust. Cut material. Cover the area to be glued with adhesive tape (masking tape) at the edges and apply adhesive (Körapur 2-component adhesive - 1 kg for approx. 2 m²). Lay in the covering, press down gently, avoiding air pockets, remove the adhesive tape. Do not enter the area for at least 24 hours. For the step edges, we recommend our **ALU rail No. 282/2**.

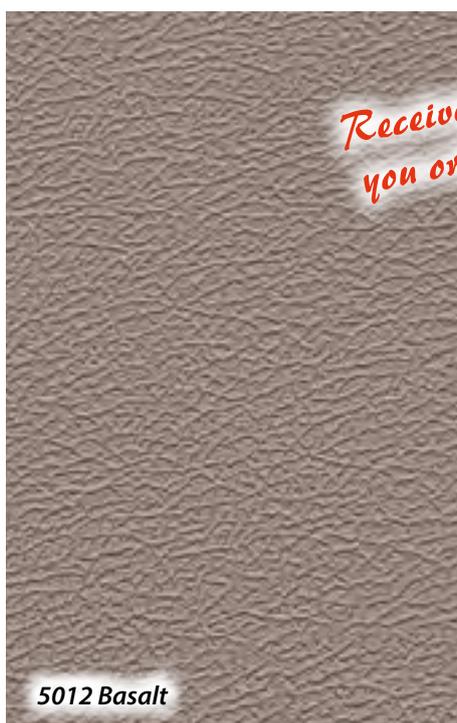

*Received upon request
you original pattern.*

PVC flooring outdoor

ART-Line Forte

ART-Line Forte is a PVC floor covering for the highest loads inside and outside. The properties of the material are identical to those of ART-Line, but thanks to its special surface structure, it is designed for areas that are subject to very high loads. We recommend our 2-component adhesive for complete bonding.

Areas of application:

Boat, yacht and shipbuilding, objects, business and exhibition rooms, baths, swimming pools, caravan and home equipment

Properties and Composition

- identical to ART-Line (see page 14)

Dimensions

- Thickness approx. 3,5 mm (with knobs)
- Width of goods approx. 180 cm
- Roll length 18 m
- Delivery from 1 running meter

Reinigung u. Verarbeitung


- identical to ART-Line (see page 14)



Application examples



Auf Wunsch erhalten Sie Originalmuster.

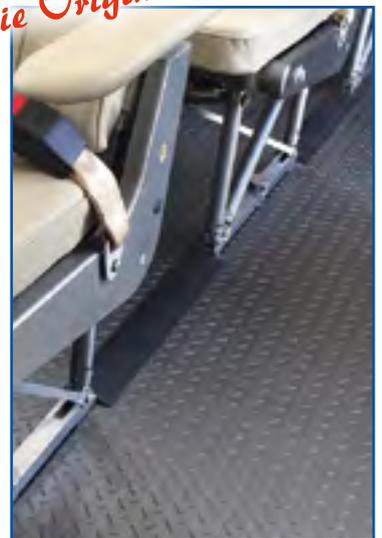

NAUTISLIP

NAUTISLIP is a UV-stabilized PVC plastic in accordance with CE guidelines, which has been treated with antioxidants and anti-mold agents. The resilient, elastic and non-slip sheet material can be cut to size like carpet and glued with our 2-component adhesive or, for dry indoor areas, with our UNI-Glue 140.

NAUTISLIP is temperature-resistant and is produced in an environmentally friendly manner.

Areas of application:

Boat, yacht and shipbuilding, vehicle and caravan equipment, swimming pools, Bathing platforms.

Properties

- Highly UV-Stable (7)
- Temperature resistant from -20° C to + 90° C
- Abrasion-resistant, tear-resistant
- Waterproof
- Antibacterial
- Dirt, grease and oil repellent
- Immune to rot
- Flame retardant DIN 75200 (B 2)

Composition

- Upper material UV-stabilized PVC plastic
- Bottom support jersey 100 % polyester
- Weight / m² approx. 1.020 g

Cleaning

Clean the NAUTISLIP with mild soap and water, rinse well and dry. Do not use solvents, chemical cleaners, steam cleaners, or pressure washers. These can damage the specially sealed surface.







Dimensions

- Total thickness 1,8 mm / ± 0,1 mm
- Width of goods approx. 140 cm
- Roll length approx. 25 - 30 m
- Delivery from 1 running meter




*Received upon request
you original pattern.*

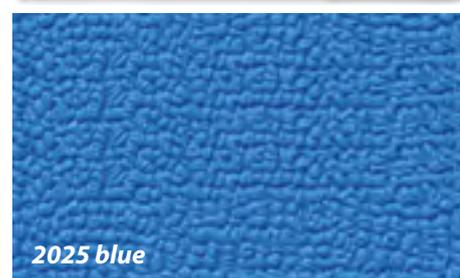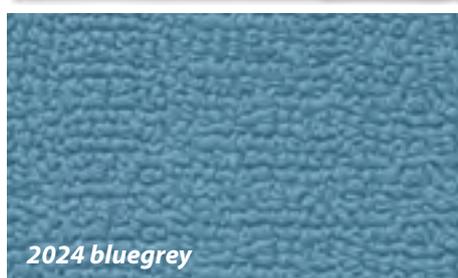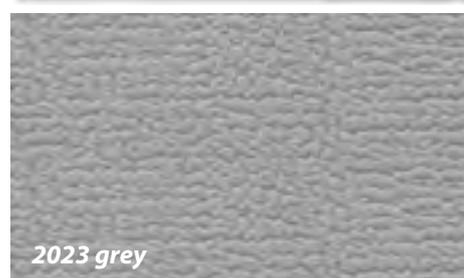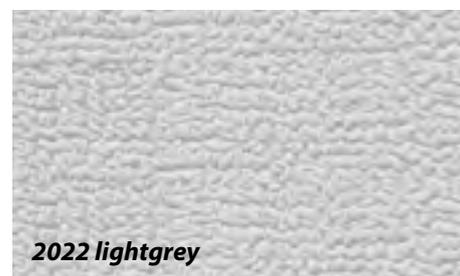

NAUTIPUR

The **NAUTIPUR** deck covering is a PVC flooring with light linen reinforcement. The surface design is similar to a woven structure. Thanks to its manufacturing process, **NAUTIPUR** is impermeable to water. **NAUTIPUR** can be used outdoors as well as indoors and is characterized by durability and lively design. If necessary, the **NAUTIPUR** deck covering can be fixed with press studs or glued with our UNI-Glue 140 in the dry interior area or Körapur for the exterior.

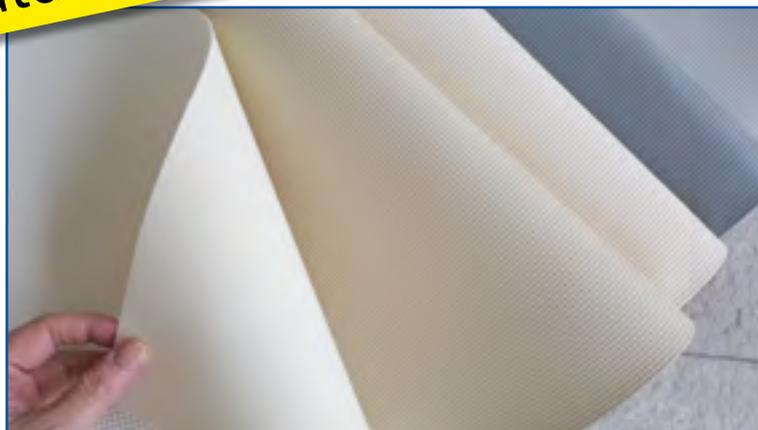

Areas of application:

Outdoor and indoor areas in boat and yacht building, caravan and vehicle construction as well as in living areas.

Properties

- Non-slip class R9 - DIN 51130
- UV-stable (7)
- Pressure and tear resistant, abrasion resistant
- Cut edge resistant
- Waterproof
- Immune to rot

Composition

- Material 90 % PVC, 10 % Pol-Cot
- Light linen reinforcement on the back
- Total weight / m² approx. 1.000 g (± 3 %)


Claening

The cleaning is done simply with water (max. 30° C) and mild soap, then rinse well. Never use gasoline, solvents, chemical cleaners, or pressure washers.




Dimensions

- Total thickness approx. 1,8 mm (± 5 %)
- Width of goods approx. 140 cm
- Roll length approx. 20 - 25 m
- Delivery from 1 running meter

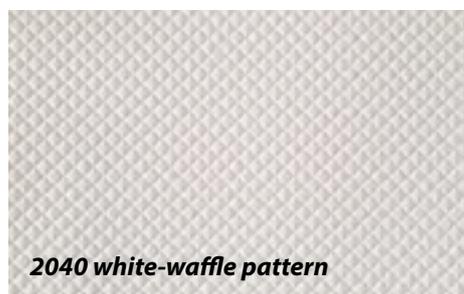

2040 white-waffle pattern

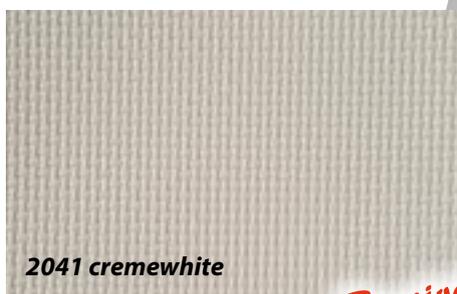


2041 cremewhite



2042 beige



2043 lightgrey

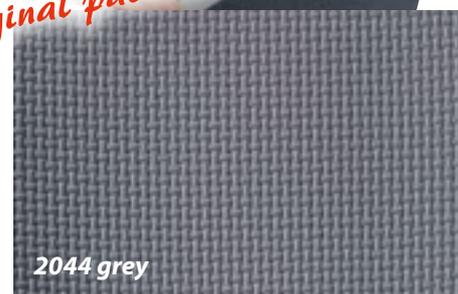

2044 grey

*Received upon request
you original pattern.*

SANDORA

SANDORA – the resistant wall and ceiling textile in suede look. The warm sheen of the velvety surface gives you a cozy atmosphere in your yacht. Thanks to its elasticity, **SANDORA** facilitates processing in hard-to-reach areas. The charmeuse on the back increases the strength and serves as a non-slip surface for the adhesive. We recommend our solvent-free UNI-Glue 140 for gluing.

Areas of application:

Boat, yacht and shipbuilding, home, caravan and vehicle equipment.

Properties

- elastic
- slightly insulating against heat and cold
- lightfast grade 5-6
- abrasion resistant 30.000 tours
- cut edge resistant

Composition



- Upper material 100 % polyester
- Polyamide foam and charmeuse
- Total weight / m² approx. 440 g

Dimensions

- Total thickness approx. 4 mm
- Width of goods approx. 150 cm / 160 cm
- Roll length approx. 50 m
- Delivery from 1 running meter

Cleaning

Wipe with a damp microfiber cloth. Stains should be treated beforehand with mild detergent or upholstery foam.

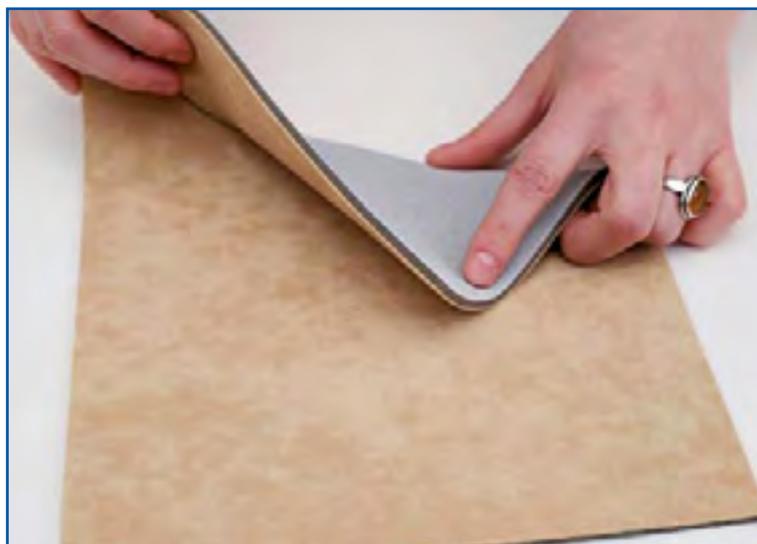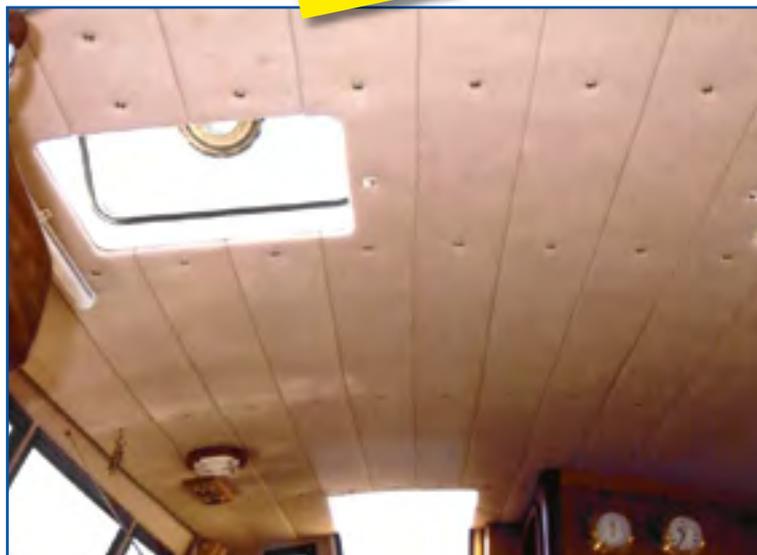

Processing

Roughly cut the SANDORA cladding. Then the solvent-free UNI-Kleber 140, set back about 2-3 cm, is applied in stages to the surfaces to be glued. Allow the adhesive to flash off a little - observe the data sheet. After the given time, place SANDORA, also in stages, in the still half-damp adhesive bed. The cladding material can then still be corrected. Work on the edges, apply some **UNI-Glue140**, press the material on or glue on the new **mounting rails** and slide in the SANDORA.



DILANA

DILANA – The insulating wall and ceiling cladding for boats, yachts and caravans.

The **DILANA** crumple velor is extremely elastic capable and therefore easy to adapt to curves and curves. Bumps are that covered. Moisture z. B. arises at night, **DILANA** can switch between its sern record. When the humidity drops, these condensation particles dry off again without leaving any residue. The charmeuse on the back forms a handy base for the adhesive.

We recommend our solvent-free UNI-Glue 140 for gluing.

Areas of application:

Boat, yacht and shipbuilding, home, caravan and vehicle equipment.

Properties

- very elastic
- slightly insulating against heat and cold
- tearproof
- cut edge resistant, does not fray
- easy to clean

Composition


- 100 % polyamide
- Total weight / m² approx. 430 g

Dimensions

- Total thickness approx. 4 mm
- Width of goods approx. 140 cm / approx. 158 cm
- Roll length 30 m - 50 m
- Delivery from 1 running meter



Cleaning

Wipe with a damp microfiber cloth, do not rub. Stains should be treated beforehand with mild detergent or upholstery foam.

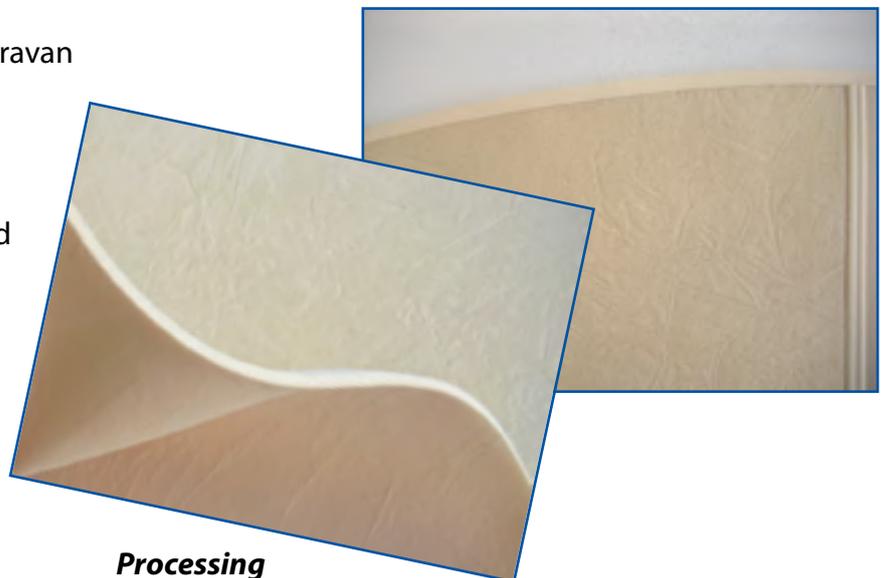

Processing

Roughly cut the DILANA cladding. Then the solvent-free UNI-Glue 140, set back about 2-3 cm, is applied in stages to the surfaces to be glued. Allow the adhesive to flash off a little - observe the data sheet. After a certain amount of time, place DILANA in the still semi-damp adhesive bed, also in stages. The cladding material can then still be corrected. Work on the edges, apply a little **UNI-Glue 140**, press the material on or glue on **mounting rails** and insert DILANA.

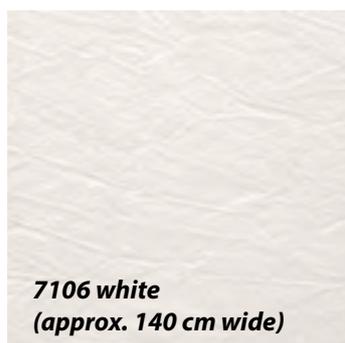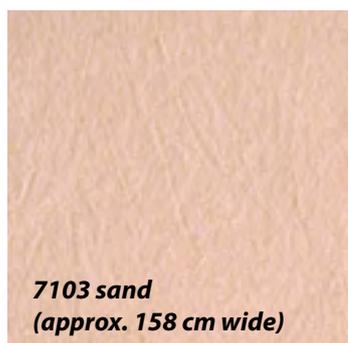

*Received upon request
you original pattern.*

GEOFLEX

GEOFLEX is a modern, fully synthetic lining textile. The material is pleasantly soft and supple and therefore extremely elastic. The easier it is to bridge unevenness with **GEOFLEX**. The cutting is done with scissors, the cut edges do not fray.

We recommend our solvent-free UNI-Glue 140 for gluing.

Areas of application:

Boat, yacht and shipbuilding, home, caravan and vehicle equipment.

Properties

- lightfast grade 8
- flame retardant ECE 118
- mold and mildew resistant
- easy to process
- cut edge resistant

Composition

- 100 % polyester
- Total weight / m² approx. 390 g

Dimensions

- Total thickness approx. 4,5 mm
- Width of goods approx. 200 cm
- Roll length approx. 30 m
- Delivery from 1 running meter

Cleaning

Die Reinigung erfolgt mit Feinwaschmittel oder Polsterschaum.

Processing

Cut GEOFLEX generously to size according to the area. Then apply the solvent-free UNI-Kleber 140, about 2-3 cm back from the edges, to the surfaces to be glued in stages. Allow the adhesive to flash off a little - observe the data sheet. After a given time, place GEOFLEX in the still semi-damp adhesive bed, also in stages, correct if necessary and then press firmly. Cut the edges, apply a little **UNI glue 140** let it flash off briefly, glue on the new **mounting rails** and insert GEOFLEX.



7602 creme



7606 silver



7608 grey



7611 blue



TAMARA

TAMARA is a robust wall and ceiling textile. The soft surface gives you a cozy atmosphere in your boat or yacht. The openwork color conceals slight unevenness. The **TAMARA** wall and ceiling cladding facilitates processing in hard-to-reach areas thanks to its elasticity. The charmeuse on the back increases the strength and serves as a non-slip surface for the adhesive.

We recommend our solvent-free UNI-Glue 140 for gluing.

You can create templates in advance for areas that are difficult to access. Our stencil film is ideally suited for this.

Areas of application:

Boat, yacht and shipbuilding, home, caravan and vehicle equipment.

Properties

- Elastic
- Slightly heat and cold insulating
- Lightfast grade 5 - 6
- Abrasion resistant
- Cut edge resistant

Composition


- Upper material 70 % polyester, 30 % viscose
- Polyamide foam and charmeuse
- Total weight / m² approx. 250 g

Dimensions

- Total thickness approx. 5 mm
- Width approx. 175 cm
- Delivery from 1 running meter
- Roll length approx. 40 m

Processing

Cut TAMARA generously according to the areas. Apply the solvent-free **UNI-Glue 140**, about 2-3 cm back from the edges, to the surfaces to be glued in stages. Let the glue flash off a little. After a given time, place TAMARA, also in stages, in the still half-damp adhesive bed, correct if necessary and then press firmly. Cut the edges to size, apply a little glue, let it flash off briefly, glue on the **mounting rails** and slide in TAMARA.

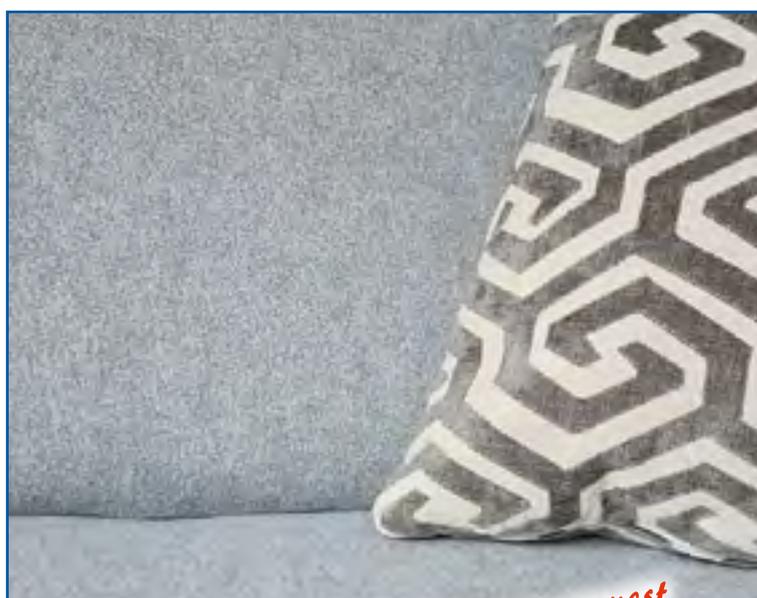

7699 speckled gray

Cleaning

Wipe with a damp microfiber cloth. Stains should be treated beforehand with mild detergent or upholstery foam.

PERLA

PERLA is a robust wall and ceiling textile. The soft surface creates a cozy atmosphere in your boat or yacht. The surface structure hides slight unevenness. The **PERLA** wall and ceiling cladding makes it easy to work in hard-to-reach places thanks to its elasticity. The charmeuse on the back increases the strength and serves as a non-slip surface for the adhesive.

We recommend our solvent-free UNI-Glue 140 for gluing.

You can create templates in advance for areas that are difficult to access. Our stencil film is ideally suited for this.



Areas of application:

Boat, yacht and shipbuilding, home, caravan and vehicle equipment.

Properties

- Elastic
- Slightly heat and cold insulating
- Lightfast: Grade 5-6
- Abrasion resistant
- Cut edge resistant

Composition

- Outer material 50 % polyester, 50 % PU foam
- Polyamide foam and charmeuse
- Total weight / m² approx. 400 g

Dimensions

- Total thickness: approx. 4 mm
- Width: approx. 160 cm
- Delivery: from 1 running meter
- Roll length: approx. 30 - 40 m

Processing

Cut PERLA generously according to the areas. Apply the solvent-free **UNI-Glue 140**, about 2-3 cm back from the edges, to the surfaces to be glued in stages. Let the glue flash off a little. After a given time, place PERLA in the still semi-damp adhesive bed, also in stages, correct it if necessary and then press firmly. Cut the edges, apply a little glue, let it flash off briefly, glue on the **mounting rails** and insert PERLA.

Cleaning

Wipe with a damp microfiber cloth. Stains should be treated beforehand with mild detergent or upholstery foam.

PATERMO

PATERMO – the versatile wall and ceiling cladding. **PATERMO** is a vinyl foam. Due to its leather grain and the silk matt surface, **PATERMO** is ideally suited for wall and ceiling cladding, especially in the pantry or wet area. The heat and cold exchange and thus also the formation of condensation water is contained by **PATERMO**. **PATERMO** can be processed around corners and curves.

We recommend our solvent-free UNI-Glue 140 for gluing.

Properties

- lightfast grade 6
- flame retardant MVSS 302
- slightly insulating against heat and cold
- solvent-free
- suitable for allergy sufferers
- waterproof
- Continuous buckling behavior approx. 50.000

Composition


- 100 % PVC vinyl foam
- Total weight / m² approx. 1.000 g

Dimensions

- Total thickness approx. 3 mm
- Width of goods approx. 140 cm
- Roll length approx. 20 m
- Delivery from 1 running meter

Cleaning

Wipe with a damp cloth, possibly with the addition of liquid mild detergent. Measures to preserve the material are not required.


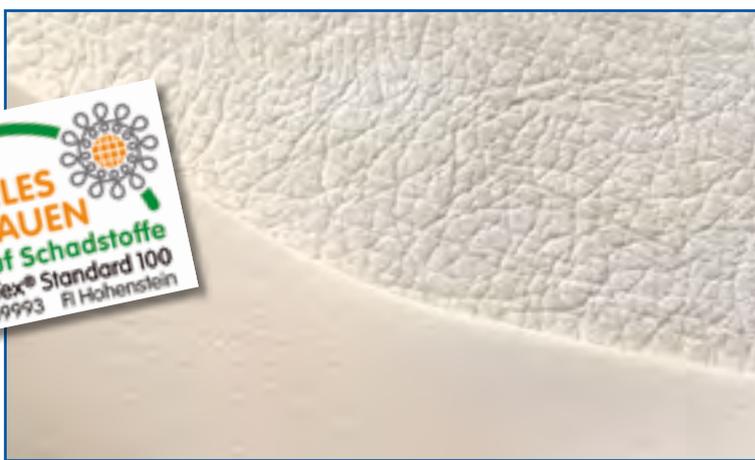


Areas of application:

Boat, yacht and shipbuilding, home and leisure, caravan and vehicle construction.

Processing

Roughly cut PATERMO. Then the solvent-free UNI-Kleber 140, set back about 2 - 3 cm, is applied in stages to the surface to be glued. Allow the adhesive to flash off a little - please refer to the data sheet. After a certain amount of time, insert PATERMO into the still semi-damp adhesive bed, also in stages. The cladding material can easily be corrected as long as the adhesive is still wet. Cut the edges, apply some **UNI-Glue 140**, press the material on or glue on the new **mounting rails** and insert PATERMO.

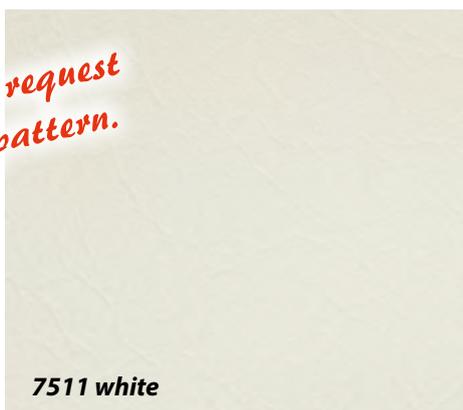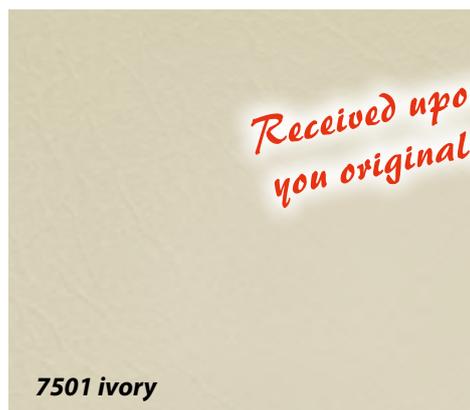

LAGUNA-Plus

The wall and ceiling cladding **LAGUNA-Plus** is a combination of the artificial leather LAGUNA with laminating foam and charmeuse. **LAGUNA-Plus** has a pleasant padding and an insulating effect. *Due to the light grain and shading of the surface, the material looks lively and leather-typical.* The charmeuse on the back increases the strength and is the right base for the glue. We recommend our solvent-free UNI-Glue 140 for gluing.

Areas of application:

Boat, yacht and shipbuilding, home and Leisure, caravan and vehicle construction.

Properties


- typical of leather
- abrasion resistant > 100.000 tours
- tearproof
- salt water resistant
- UV-stable grade 6
- insulating
- insensitive to dirt
- Flame retardant upper material
- phthalate free

Composition

- Upper material approx. 87 % PVC, 13 % polyester / viscose jersey fabric
- PUR foam - Charmeuse (PES)
- Total weight m² approx. 780 g

Dimensions

- Total thickness approx. 4 mm
- Width of goods approx. 140 cm
- Roll length approx. 25 m
- Delivery from 1 running meter

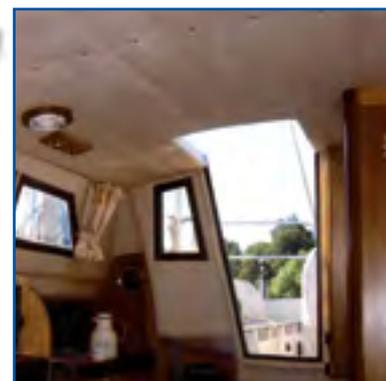

Cleaning

Wipe with a damp cloth with warm water with the addition of liquid mild detergent. Maintenance measures to preserve the material are not required.

Processing

Cut LAGUNA-Plus generously. Then apply the solvent-free UNI-Kleber 140, about 2-3 cm back from the edges, to the surfaces to be glued in stages. Let the glue flash off a little. Observe data sheet. After the given time, lay LAGUNA-Plus, also in stages, into the still semi-damp adhesive bed. The cladding material can then still be corrected. Work on the edges, apply a little **UNI-Glue 140**, press the material on or glue on the new **mounting rails** and insert LAGUNA-Plus.



KARO quilted indoor

KARO quilted is a combination of artificial leather, an intermediate layer of PUR foam and fleece on the back and is double-quilted in a checked pattern.

The check size is approx. 3 cm x 3 cm and runs diagonally. The **KARO quilted** artificial leather is used as wall cladding or as upholstery **indoors** in boat and yacht equipment, in caravan and vehicle construction as well as in the home. For gluing, we recommend the solvent-free **UNI-Glue 140**.

Areas of application:

Boat, yacht and shipbuilding, home and leisure, caravan and vehicle construction in the indoor area.

Properties

- UV-stable: grade 5
- Rubbing fastness: grade 4 - 5
- Abrasion cycles > 100.000
- Antibacterial
- Phthalate free

Composition


- Upper material: 100 % polyurethane
- Base material PUR foam with fleece
- Weight / m² approx. 660 g

Dimensions

- Total thickness approx. 4 - 5 mm
- Width of goods approx. 140 cm
- Delivery from 1 running meter
- Roll length approx. 30 m


Cleaning

Use light soapy water, rinse with clean water, dry with a cloth. Do not use organic solvents.

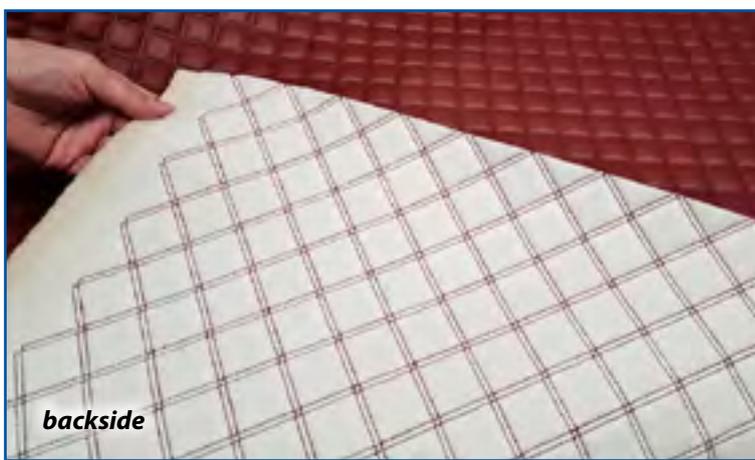

Processing

The material can be sewn, glued or stapled. When gluing: Quilted KARO generously cut to size to match the area. Then apply the solvent-free **UNI-Glue 140**, about 2-3 cm back from the edges, to the surfaces to be glued in stages. Allow the adhesive to flash off a little - observe the data sheet (supplied). After a given time, quilted KARO, also in stages, place in the still half-damp adhesive bed, correct if necessary and then press firmly. Cut the edges, apply a little glue, let it flash off briefly, glue on the **mounting rails** and insert the KARO quilted.

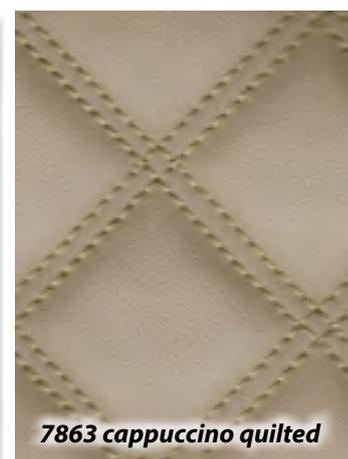

*Received upon request
you original pattern.*

KARO welded outdoor

KARO welded outdoor is a combination of synthetic leather, an intermediate layer of PUR foam and fleece on the back and is welded in a check pattern at high frequencies. The check size is approx. 6 cm x 6 cm and runs diagonally. The **KARO** artificial leather is used as wall cladding or as upholstery, mainly outdoors in boat and yacht equipment, in caravan and vehicle construction as well as in the home. For gluing, we recommend the solvent-free UNI-Glue140.

Areas of applications:

Boat, yacht and shipbuilding, home and leisure, caravan and vehicle construction in the outdoor area

Properties

- UV-stable: grade 5
- Rubbing fastness: grade 4 - 5
- Abrasion cycles > 100.000
- Antibacterial
- Phthalate free

Composition


- Upper material 100 % polyurethane
- Base material PUR foam with fleece
- Weight / m² approx. 750 g

Dimensions

- Total thickness: approx. 4 - 5 mm
- Width: approx. 140 cm
- Usable width: approx. 135 cm
- Delivery: from 1 running meter
- Roll length: approx. 30 m

Cleaning

Use light soapy water, rinse with clean water, dry with a cloth. Do not use organic solvents.

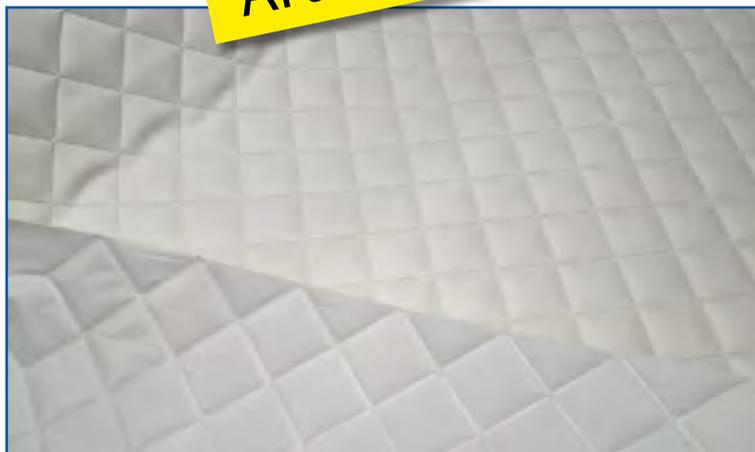

Processing

KARO welded and cut generously to the surfaces accordingly. Then apply the solvent-free **UNI-Glue 140**, about 2-3 cm back from the edges, to the surfaces to be glued in stages. Allow the adhesive to flash off a little - observe the data sheet (supplied). After a given time, KARO welded, also in stages, place in the still semi-damp adhesive bed, correct if necessary and then press firmly. Cut the edges to size, apply a little glue, let it flash off briefly, glue on the **mounting rails** and insert the KARO welded.



7860 white welded

STRUKTURA

The **STRUKTURA** wall and ceiling cladding is a combination of synthetic leather with laminated foam and charmeuse. You get a pleasant padding and an insulating effect through the foam, which is used in the middle. The back is covered with a charmeuse, which, on the one hand, provides greater strength and, on the other hand, is the right basis for the solvent-free UNI-Glue 140.

STRUKTURA is ideal for straight surfaces and slight curves.

Areas of applications:

Boat, yacht and shipbuilding, home and leisure, caravan and vehicle construction in the outdoor area

Properties

- Scratch-, abrasion- and tear-resistant
- Sea water resistant
- UV-resistant
- Insulating
- Breathable thanks to the perforated surface

Composition

- 87 % PVC, 13 % polyester / jersey fabric
- PUR foam - Charmeuse (PES)
- Total weight / m² 600 g

Dimensions

- Total thickness approx. 6 mm
- Width of goods approx. 125 cm
- Delivery from 1 running meter
- Roll length approx. 25 m

Cleaning

Wipe with a damp cloth with warm water, with the addition of liquid mild detergent. A maintenance measure to preserve the material is not necessary.



Processing

Generously cut the wall and ceiling cladding structure. Then apply the solvent-free **UNI-Glue 140**, set back about 2 - 3 cm from the edges, in stages on the surfaces to be glued. Let the glue flash off a little. Note data sheet! After a certain period of time, lay the wall and ceiling cladding, also in stages, in the still semi-damp adhesive bed. The cladding material can then still be corrected. Work on the edges, apply a little UNI glue, press the material on or glue on the **PVC mounting rails** and slide in the Struktura.


*Received upon request
you original pattern.*



7770 cremewhite



PVC mounting rails

These edging and connecting profiles facilitate the processing of wall and ceiling coverings. The materials can be joined with the T-profile. The edging profile ensures that window borders and visible edges are neatly finished. The rails are made of soft PVC, so they are very flexible and adapt to curves and curves without any problems. We recommend our solvent-free UNI-Glue 140 for gluing.

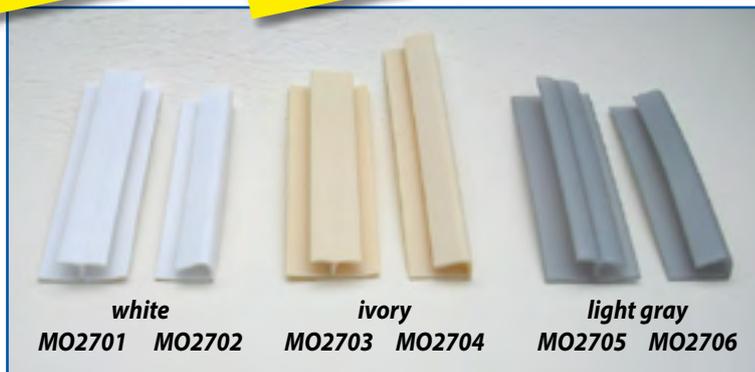

Technical specifications

- Material: 100 % soft PVC
- Length: approx. 150 cm
- Colors: white, ivory, light gray
- Delivery from 1 pc.

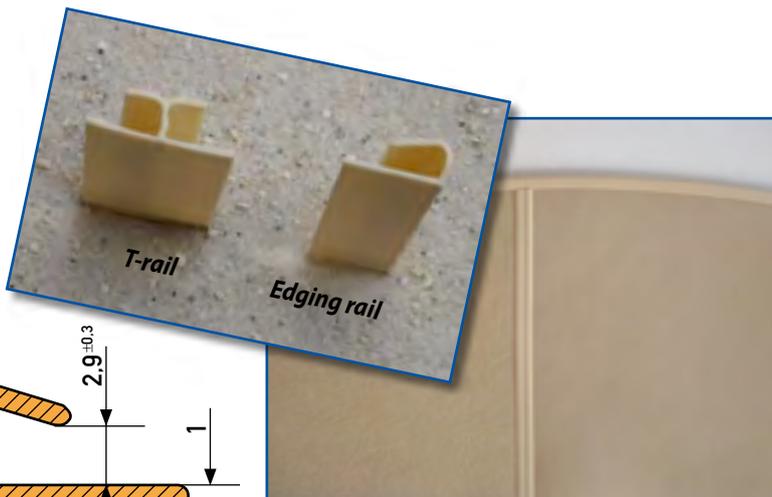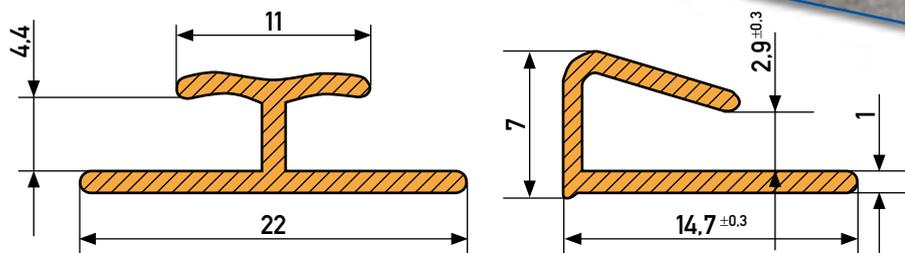



ALU rails

Step edge rails for deck and carpet coverings

The rails are made of anodized aluminum, colored in stainless steel, drilled and are specially designed for fixing surfaces at entrances and crossings. They can be glued or screwed.

Technical specifications

- Material: anodized aluminum
- Length: approx. 100 cm
- Delivery from 1 pc.

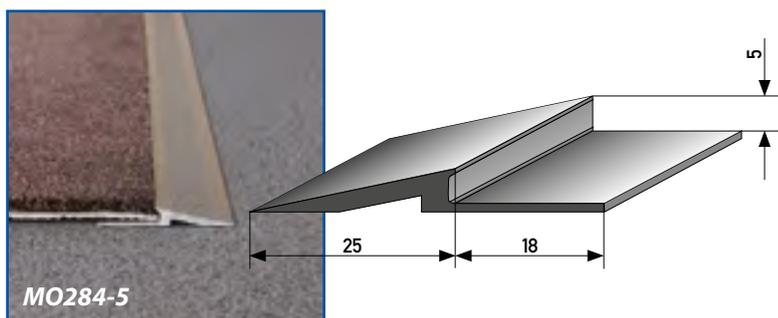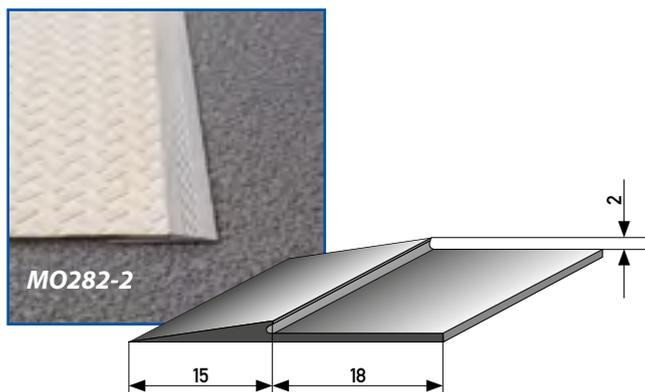

SATINO

SATINO is a nubuck synthetic leather with the typical velvety surface. This special product **SATINO** is pleasantly soft, has a very good grip and can hardly be distinguished from real leather due to its natural look and feel. This makes **SATINO** ideal for all types of upholstery and coverings indoors.

Areas of application:

Boat, yacht and shipbuilding, home, caravan and vehicle equipment.

Properties

- abrasion-resistant > 51.200 tours
- UV-resistant grade 6-7
- flame retardant (EN 1021/1)
- waterproof
- phthalate free
- antibacterial, antifungal

Composition

- 63 % PVC, 4 % PU upper material
- 33 % CO back fabric
- Total weight / m² approx. 610 g



Dimensions

- Total thickness approx. 1,0 mm ± 0,1 mm
- Width of goods approx. 140 cm
- Roll length approx. 30 m
- Delivery from 1 running meter

Cleaning

Remove the dirt with a damp cloth. Stains can be carefully removed with a little liquid soap or washing-up liquid.



3810 sand



3811 pebble



3812 mocca



3813 olive



3814 fire




3815 wine



3816 silver



3817 slate

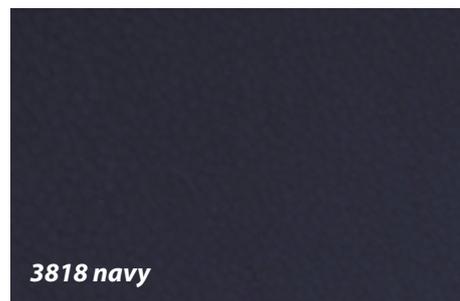

3818 navy

*Received upon request
you original pattern.*

resistant

LAGUNA

This modern synthetic leather is pleasantly soft and typical of leather, but nevertheless extremely resistant. **LAGUNA** is ideal for upholstery in boat, yacht and vehicle construction for indoor and outdoor use. *Due to the light grain and shading of the surface, the material looks lively and leather-typical.* The artificial leather **LAGUNA** is also used on medical beds and for furniture of all kinds.

Areas of application:

Boat, yacht and shipbuilding, caravan and vehicle construction

Properties


- abrasion resistant > 100,000 tours
- salt water resistant
- UV-resistant grade 6, DIN EM ISO 105-BO2
- flame retardant EN 1021 / part 1.2 / MVSS 302
- insensitive to dirt
- phthalate-free

Composition

- approx. 87 % PVC upper material
- approx. 13 % polyester / viscose jersey fabric
- Total weight / m² approx. 540 g

Cleaning

Use light soapy water with clear water. Rinse off the water and dry with a cloth. Do not clean with organic solvents.

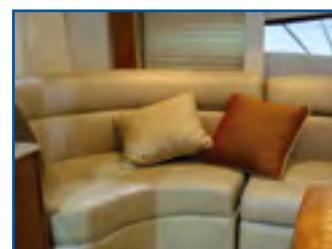


Dimensions

- Total thickness approx. 1,0 mm ± 0,1 mm
- Width of goods approx. 140 cm
- Roll length approx. 25 m
- Delivery from 1 running meter

Processing

Sewing, basting, gluing (we recommend UNI glue 140), HF welding.

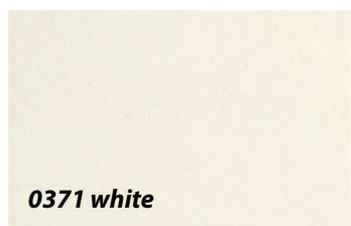

0371 white




0380 black




0372 ivory




0370 P ivory embossed

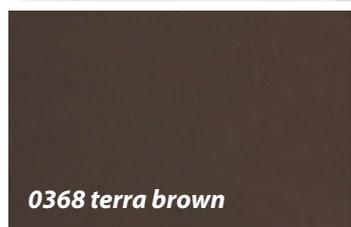

0368 terra brown

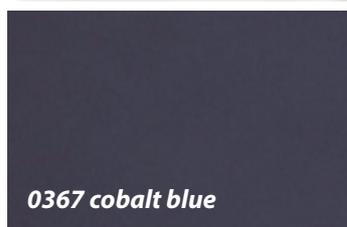


0367 cobalt blue

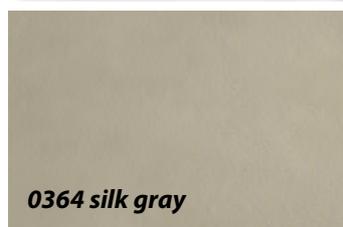

0364 silk gray



0376 P silk gray embossed

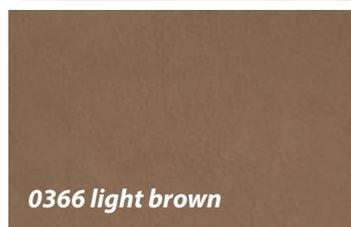

0366 light brown



0377 carmine



0379 basalt gray



0375 P beige

*Received upon request
you original pattern.*

soft, elastic

KARIBIK

KARIBIK is a pleasantly soft, elastic, abrasion-resistant synthetic leather, which is characterized by its special ease of care and long durability. **KARIBIK** is used for upholstery of all kinds, for cladding indoors and outdoors, in boat and vehicle construction, as well as for medical beds. We recommend our solvent-free UNI-Glue 140 for gluing.

Areas of application:

Boat, yacht and shipbuilding, caravan and vehicle construction

Properties

- abrasion resistant
DIN EN ISO 5470-2 > 100,000 tours
- salt water resistant
- UV-resistant ≥ grade 6, DIN EN ISO 105-BO2
- flame retardant DIN EN 1021, 1 + 2 / MVSS 302
- cold and heat resistant
- insensitive to dirt
- phthalate free

Composition

- approx. 88 % PVC upper material
- approx. 12 % polyester / viscose fabric
- Total weight / m² approx. 600 g

Dimensions

- Total thickness approx. 1,1 mm ± 0,1 mm
- Width of goods approx. 140 cm
- Roll length approx. 25 m
- Delivery from 1 running meter



Cleaning

Use light soapy water, rinse with clean water, dry with a cloth. Do not use organic solvents. Maintenance that preserves the material is not required.

Processing

Sewing, stapling, gluing, HF welding.



metallic look

ALCANTE

ALCANTE is a soft synthetic leather that was specially developed for upholstery that is subject to heavy use. The metallic look of the surface and the fabric embossing give **ALCANTE** a modern look.

We recommend our solvent-free UNI-Glue 140 for gluing.

Areas of application:

Boat, yacht and shipbuilding, caravan and vehicle construction

Properties

- UV-stable 1000 hours / grade 7
- Fastness to rubbing 100.000 rubs
- water repellent, salt water resistant
- flame retardant FMVSS 302 / DIN 4102 B 2
- Resistant to cold fractures down to - 23 ° C
- antimicrobial finish

Composition

- 100 % polyester
- Weight approx. 690 g / m²

Dimensions

- Total thickness approx. 1,1 mm ± 0,1 mm
- Width of goods approx. 137 cm
- Roll length approx. 30 m
- Delivery from 1 running meter



Cleaning

ALCANTE has a protective coating so that even difficult stains can be easily removed with a dry cloth. Stubborn Stains can be removed with isopropyl alcohol.

Processing

Sewing, stapling, gluing, HF welding.



3630 carbon creme



3631 carbon silver



3601 creme




3602 ivory



3603 beige



3604 wine red

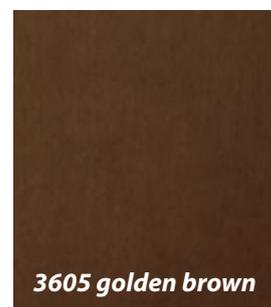

3605 golden brown



3606 silver



3607 blue



3608 marine



3609 anthrazit



3610 mocca

Received upon request
you original pattern.

ALCANTARA®

Excellent for upholstery, wall and Ceiling cladding

A wide variety of applications, as well as specific solutions and excellent results are possible with **ALCANTARA®**. Its unmistakable softness, elegance and colors, which salt cannot harm, together with the high strength and ease of care result in a unique combination.

In addition, **ALCANTARA®** guarantees special resistance to all atmospheric influences. Shiny colors, light and tear resistance, extraordinary suppleness are the characteristics with which the interior of yachts can be optimally equipped.

Areas of application:

Boat, yacht and shipbuilding, home and leisure, caravan and vehicle equipment.

Properties

- lightfast according to AATCC-16A ≥ 4 gray scale
- colorfast according to AATCC-61 + 132 ≥ 4 gray scale
- tear and tear resistant
- wear-resistant according to BS 5690/91 $\geq 30,000$ cycles
- salt water resistant

Composition

- Top 68 % PES, 32 % PU
- Back cover 65 % PES, 35 % BW (CO)
- Total weight / m² approx. 350 g



Dimensions

- Total thickness approx. 1,0 mm \pm 0,1 mm
- Width of goods approx. 142 cm
- Roll length approx. 45 - 50 m
- Delivery from 1 running meter

Cleaning

Stains can usually be easily removed with a damp cloth (dab - do not rub).



*Received upon request
you original pattern.*



Suede feel

MICROSA

Modern cover material

MICROSA is a cover material with unique properties for all interior upholstery. **MICROSA** has a soft, velvety, suede-like surface. It retains its shape, dries quickly, is breathable and is resistant to lint. The unique handle, durability and ease of care enable creative and exclusive design options.

Areas of application:

All upholstery for the inside in boat, yacht and shipbuilding, home and leisure as well as caravan equipment.

Properties

- pressure and tear resistant
- lightfast grade 4/5 ISO 105 / B02
- rub-proof grade 4/5 ISO 105 / X12
- resistant to approx. 40.000 tours DIN 53863/3
- water and dirt repellent
- easy care

Composition

- Upper material 75 % polyester
- Carrier fabric 25 % cotton
- Total weight approx. 260 g / m²

Cleaning

Stains can be easily removed with a damp Remove microfiber cloth.



Dimensions

- Width of goods approx. 140 cm
- Roll length approx. 35 - 40 m
- Delivery from 4,0 running meters



Further information and the current prices can be found on our website www.kaehne-bootsausstatter.de

with EASY CLEAN

AMERA

AMERA - The easy-care upholstery fabric

The indoor upholstery fabric **AMERA** is equipped with EASY CLEAN and is therefore insensitive to moisture and dirt. The double flocking with special microfibers resulted in an upholstery fabric of exclusive quality.

Areas of application:

Boat, yacht and shipbuilding, home and leisure, caravan equipment.

Properties

- pressure and tear resistant
- lightfast grade 6, ISO 105 / BO2
- rub-resistant grade 4, ISO 12945-2
- resistant > 250.000 tours (Martindale)
- flame retardant EN 1021 part 1 + 2
- dirt-repellent
- cut edge resistant
- easy to care for

Composition

- 50 % Polyester, 35 % Acrylic, 15 % PA
- Total weight / m² 410 g





Dimensions

- Width of goods approx. 140 cm
- Roll length approx. 50 m
- Delivery from 4 running meter

Cleaning

Remove any remains of the spilled substance from the affected upholstery fabric. Moisten the stain with water and wait a few moments. Press a cloth on the stain and rub gently over the upholstery fabric using circular motions.

*Received upon request
you original pattern.*

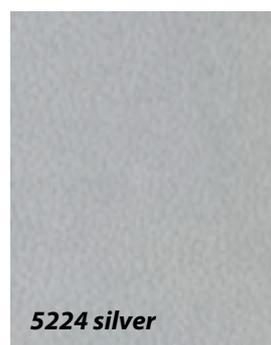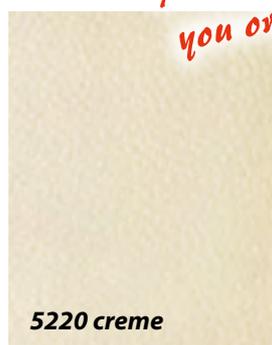

SARIA

With AquaClean technology

The comfortable indoor upholstery fabric **SARIA** is equipped with **AquaClean technology**. It has a structure that was created to facilitate cleaning and make it difficult to pull the strings. **SARIA** has a **SafeFront treatment**, which largely prevents the spread of bacteria and mites.

This makes this upholstery fabric particularly suitable for living with pets.

Areas of application:

Boat, yacht and shipbuilding, home and leisure, caravan equipment.

Properties

- pressure and tear resistant
- lightfast: grade 6 - ISO 105 / BO2
- rubbing resistant: grade 4 - ISO 12945-2
- resistant > 250.000 tours (Martindale)
- flame retardant EN 1021 part 1 + 2
- dirt-repellent
- cut edge resistant
- easy to care for

Composition

- 50 % polyester, 35 % acrylic, 15% polyamide
- Total weight / m² 410 g



Dimensions

- Width of goods approx. 140 cm
- Roll length approx. 35 m
- Delivery from 4 running meters

Cleaning

Remove any remains of the spilled substance from the affected upholstery fabric. Moisten the stain with water and wait a few moments. Press a cloth on the stain and rub gently over the upholstery fabric using circular motions.



TINOS

TINOS is a waterproof, UV-stable upholstery material for outdoor use. The PE film on the back prevents water or other liquids from penetrating.

Areas of application:

Boat, yacht and shipbuilding, home and leisure, caravan equipment.

Properties

- waterproof
- highly UV-stable grade 7
- wear-resistant > 80.000 tours
- antibacterial
- easy to care for

Composition

- Upper material 90 % polyester
- Back 10 % polyethylene film
- Total weight / m² approx. 300 g



Dimensions

- Width of goods approx. 140 cm
- Roll length approx. 25 m
- Delivery from 6 running meters



Cleaning

Most stains can be removed with a damp, clean microfiber cloth. If detergents have been used, always ensure that all soap residues are removed from the fabric.

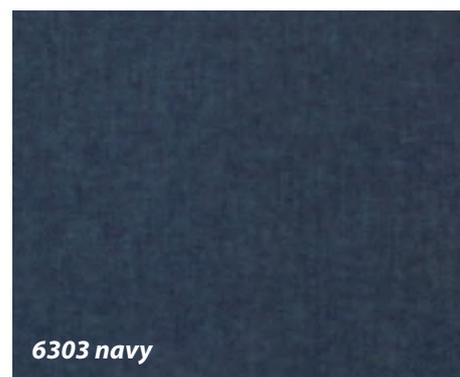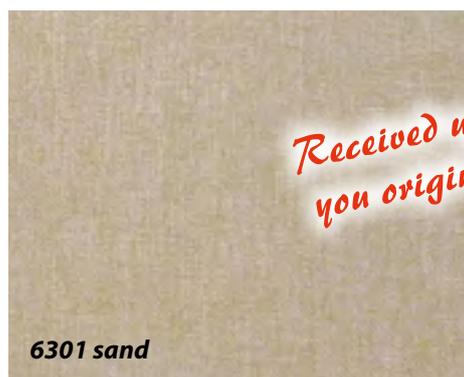

Waterproof

RHODOS

The **RHODOS** poster fabric is a woven outdoor upholstery fabric with a soft feel and a water-proof PE film on the reverse. **RHODOS** is particularly characterized by moisture and dirt persistence.

The sticking due to sweating on the seating and lying surfaces is a thing of the past.

Areas of application:

Boat, yacht and shipbuilding, home and Leisure, caravan equipment.

Properties



- highly UV-stable grade 7
- weatherproof grade 7
- abrasion-resistant approx. 25.000 tours
- waterproof
- salt water resistant
- dirt, grease and oil repellent
- immune to rotting
- antibacterial

Composition

- Shell 100 % polyester (PES)
- PE film underside
- Total weight / m² approx. 260 g

Cleaning

If necessary, re-impregnate after cleaning.

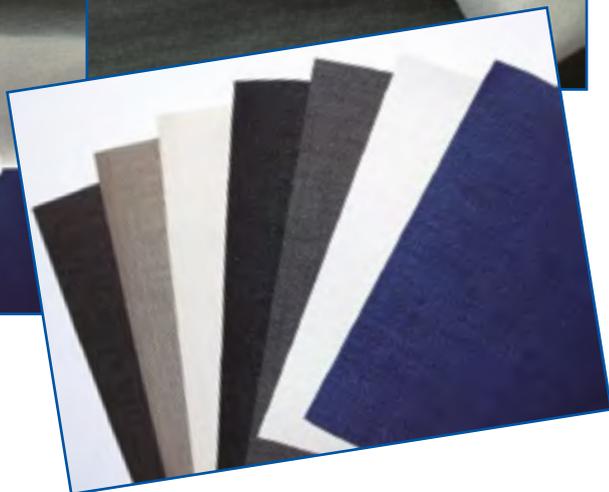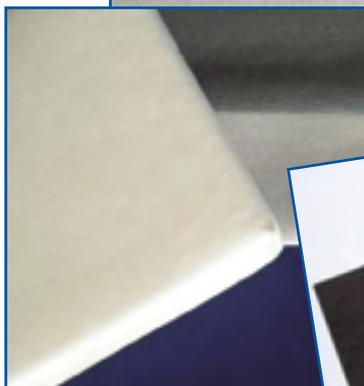

Dimensions

- Width of goods approx. 140 cm
- Roll length approx. 25 m
- Delivery from 6 running meters


*Received upon request
you original pattern.*



6780 white



6781 natur

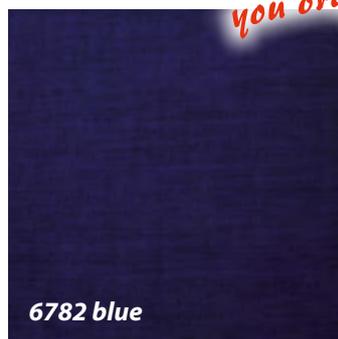

6782 blue



6783 pebble



6784 mocca



6785 anthracite



6786 black



6742 beige (expiring)

AIR LIFT air mat

The original

The **AIR LIFT air mat**, the spacer fabric, solves the problem of damp cushions in boats, caravans, etc. You simply place the mat under your cushions. This gives you optimal upholstery ventilation, which acts like an invisible climate control. The upholstery ventilation is extremely inconspicuous and still has a high surface load. The large number of upright PES threads creates a space through which the heated air can escape.

The **AIR LIFT air mat** is our long-proven padding underlay and prevents the formation of mold stains, odor and mold. Use this ventilation mat to ensure a healthy living and sleeping environment in caravans, trucks, boats or yachts. The cut is simply done with scissors.

Areas of application:

Boat, yacht and shipbuilding,
Caravan equipment.

Properties

- surface load capacity approx. 1400 kg / m²
- does not absorb moisture
- immune to rotting
- flame retardant
- temperature resistant from -20 °C to +90 °C

Composition


- Material 100 % PES (resistant plastic)
- Total weight / m² approx. 580 g
- Color white or black

Dimensions



- Thickness approx. 10 mm
- Roll width approx. 200 cm ± 5 %
- Roll length approx. 30 m
- Delivery from 1 running meter

Cleaning

Machine washable up to 60 °C synthetic program (moderate drum rotation), do not iron.

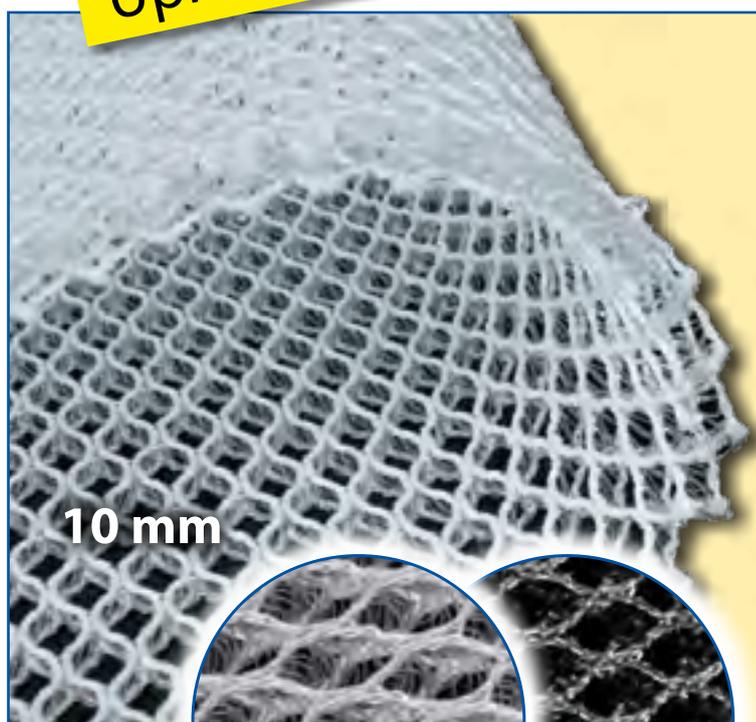

A001 white
A004 black

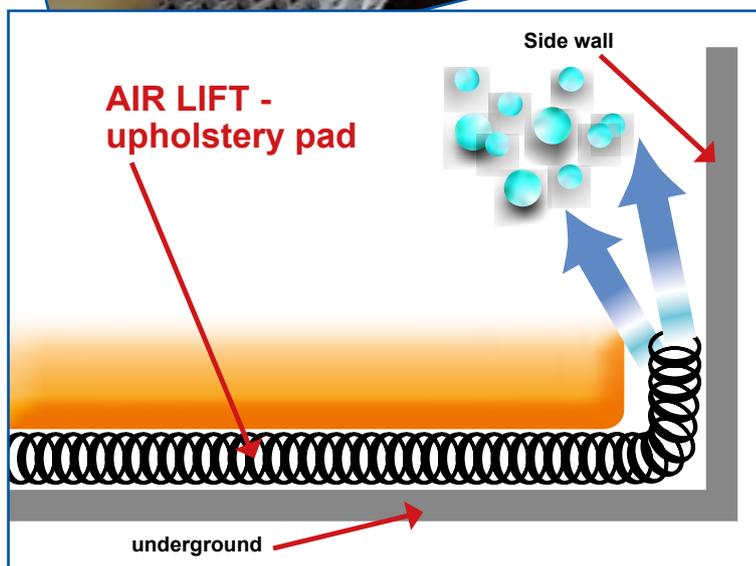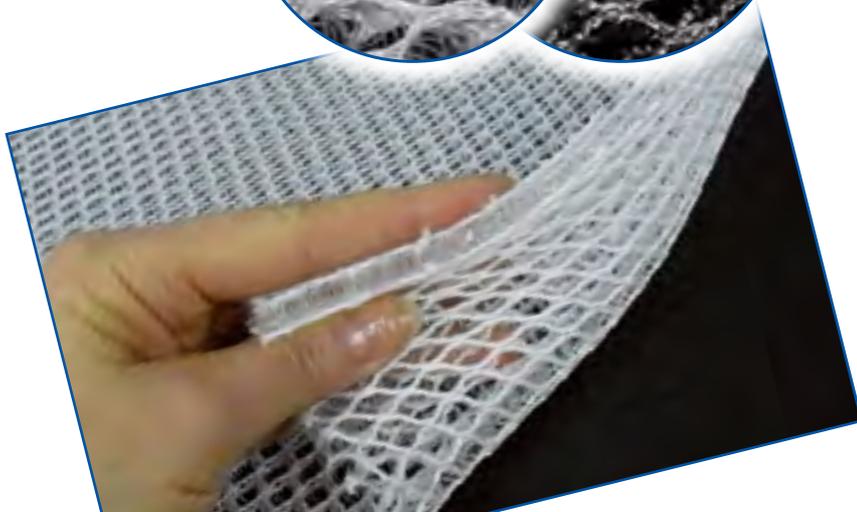

AIR LIFT Carbon

The cushioning underlay **AIR LIFT Carbon**, the spacer fabric, solves the problem of damp cushions in boats, caravans, etc. You simply place the ventilation mat under your cushions. This gives you optimal upholstery ventilation, which acts like an invisible climate control. The upholstery ventilation is not bulky.

The large number of upright PES threads creates a space through which the heated air can escape.

AIR LIFT Carbon is a proven upholstery underlay, mattress ventilation and prevents the formation of mold stains, odor and mold. Use this ventilation mat to ensure a healthy living and sleeping environment in caravans, trucks, boats or yachts and when camping. The excellent properties of the ventilation mat ensure optimal sleep. Simply cut to the desired size with scissors.

Areas of application:

Boat, yacht and shipbuilding,
Caravan equipment.

Properties

- surface load capacity approx. 1.200 kg / m²
- does not absorb moisture
- immune to rotting
- flame retardant
- temperature resistant from -20 °C to +90 °C

Composition




- Material 100% PES (resistant plastic)
- Total weight approx. 400 g / m²
- Color carbon

Dimensions

- Thickness approx. 10 mm
- Roll width approx. 200 cm ± 5%
- Roll length approx. 25 m
- Delivery from 1 running meter

Cleaning

Machine washable up to 60 °C synthetic program (moderate drum rotation), do not iron.

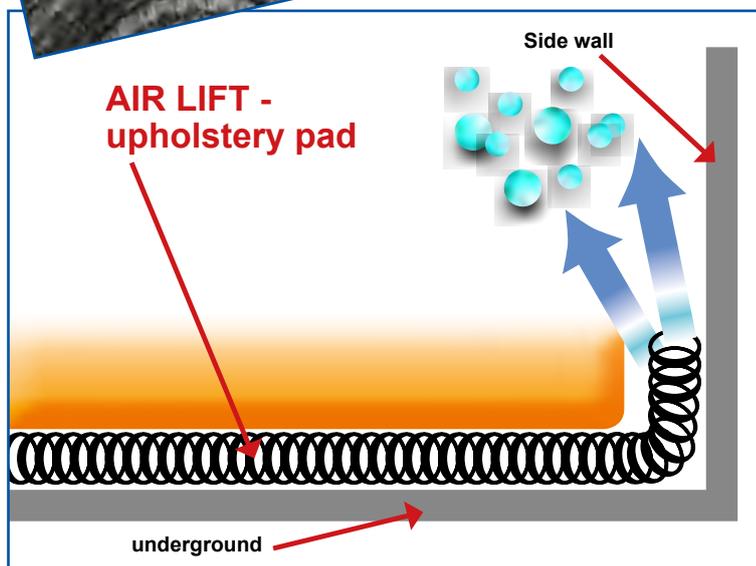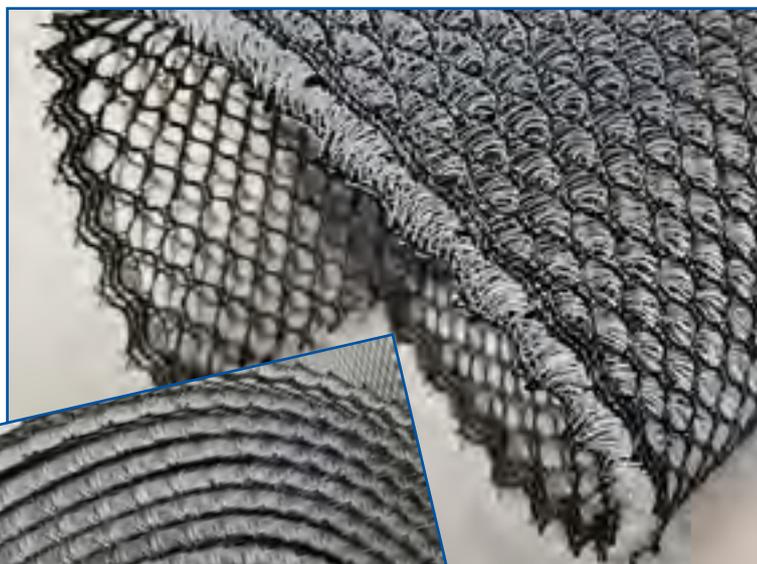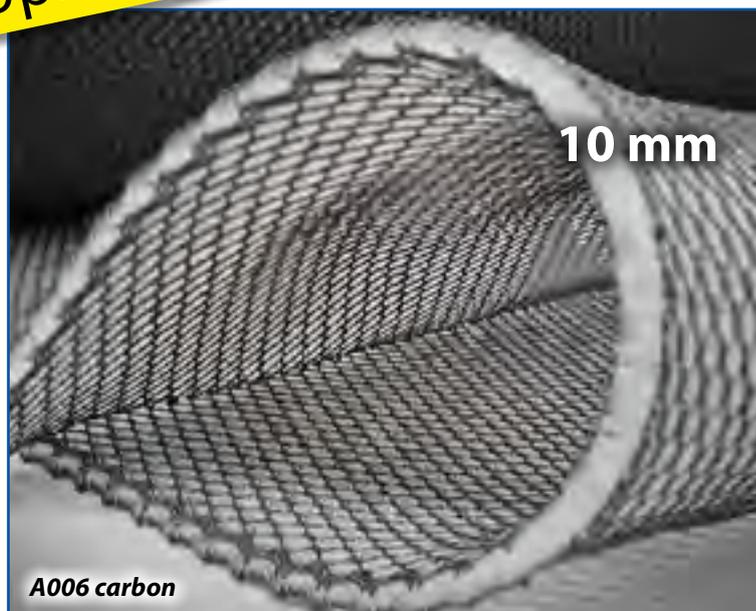

AIR LIFT - Stop

The **AIR LIFT-Stop** mat solves the problem of damp upholstery in boats, caravans, etc. The non-slip underside ensures that the upholstery can no longer slip on wood and GRP. A large number of upright PES threads create a space through which the heated air can escape. This gives you optimal ventilation from below, which acts like an invisible climate control. The spacer fabric

AIR LIFT - Stop prevents the risk of sticking, spotting, odor and mold growth. The cut is simply done with scissors.

Areas of application:

Boat, yacht and shipbuilding,
Caravan equipment.

Properties

- surface load capacity approx. 1400 kg / m²
- does not absorb moisture
- immune to rotting
- flame retardant
- temperature resistant from -20 °C to +90 °C
- very good anti-slip effect
- odorless coating

Composition



- Material 100 % PES (resistant plastic)
- PU coating on the underside
- Total weight approx. 600 g / m²
- Color white

Dimensions



- Thickness approx. 10 mm
- Roll width approx. 200 cm ± 5%
- Roll length approx. 25 m
- Delivery from 1 running meter

Cleaning

Machine washable up to 60 °C synthetic program (moderate drum rotation), do not iron.

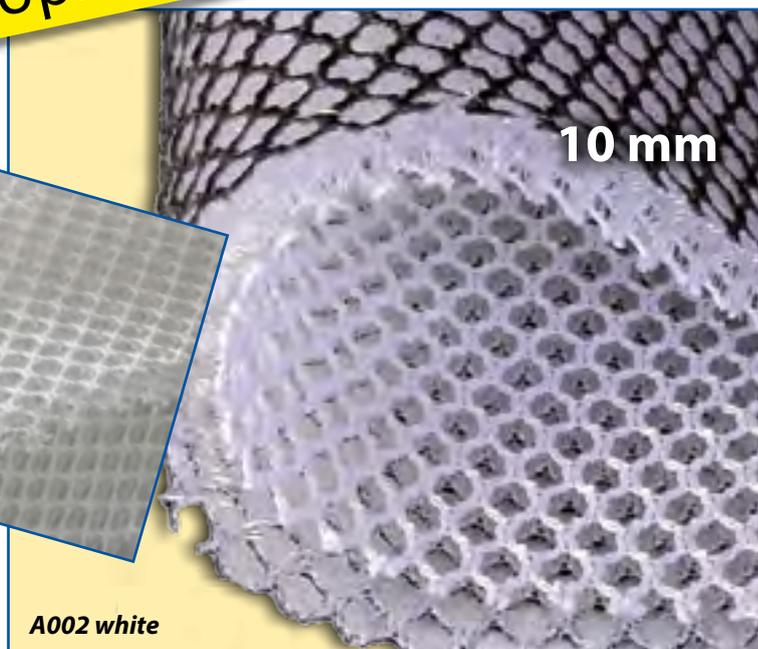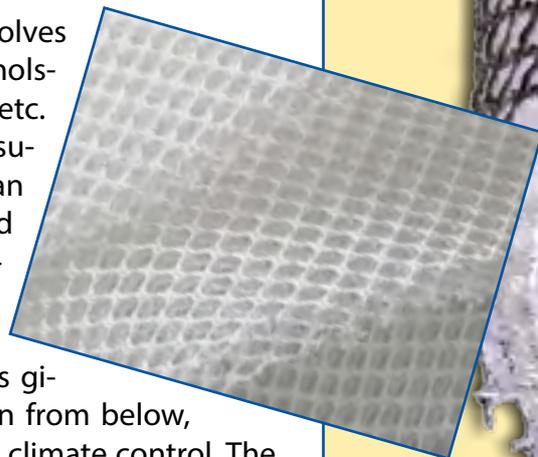

To better demonstrate the anti-slip side, it is colored dark in the picture. The material itself is white throughout.

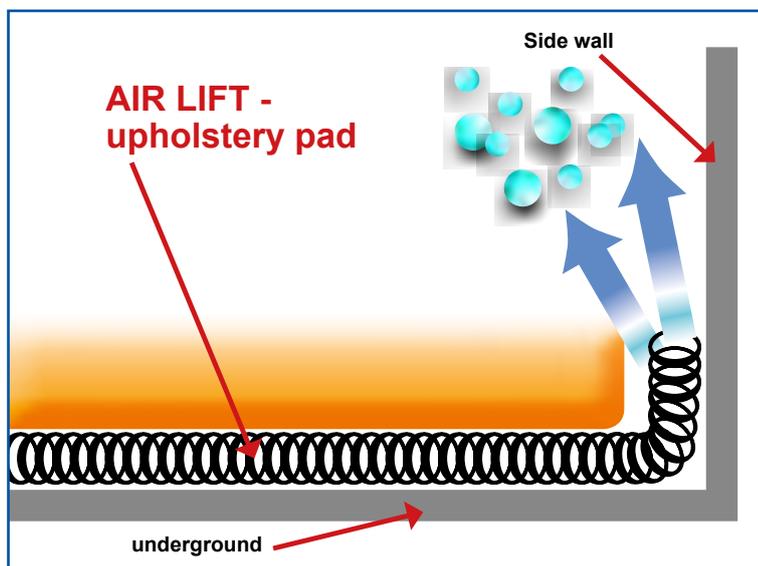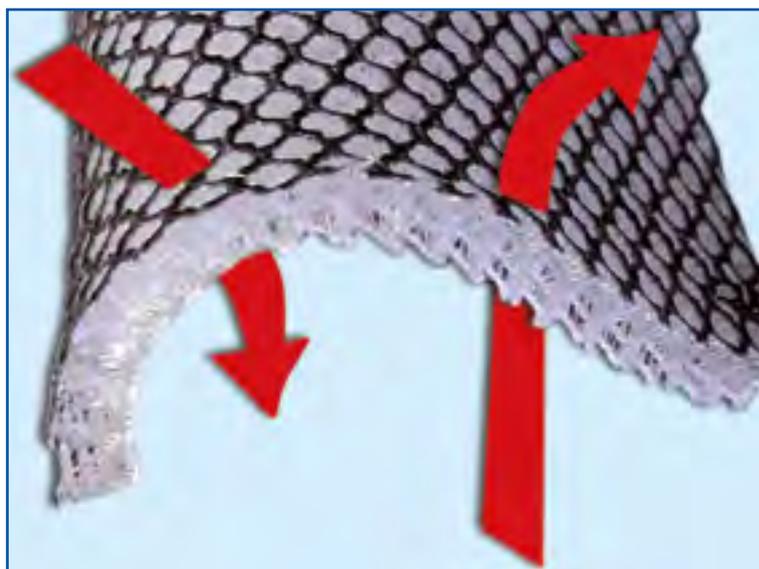

AIR LIFT - Comfort

AIR LIFT-Comfort air mat - the original

AIR LIFT-Comfort - the padding prevents moisture and increases lying comfort.

AIR LIFT-Comfort solves the problem of damp cushions in boats, caravans, etc. Lying comfort is positively influenced by the 20 mm thick material. A large number of upright PES threads create a space through which the heated air can escape. This gives you optimal ventilation from below, which acts like an invisible climate control. The spacer fabric **AIR LIFT-Comfort** prevents the risk of mold stains, odor and Mold growth.

The cut is simply done with scissors.

Areas of application:

Boat, yacht and shipbuilding,
Caravan equipment.

Properties

- surface load capacity approx. 1100 kg / m²
- does not absorb moisture
- immune to rotting
- flame retardant
- temperature resistant from -20 °C to +90 °C
- improves lying comfort

Composition



- Material 100% PES (resistant plastic)
- Total weight / m² approx. 620 g
- Color white

Dimensions

- Thickness approx. 20 mm
- Roll width approx. 200 cm ± 5%
- Roll length approx. 25 m
- Delivery from 1 running meter

Cleaning

Machine washable up to 60 ° C synthetic program (moderate drum rotation), do not iron.

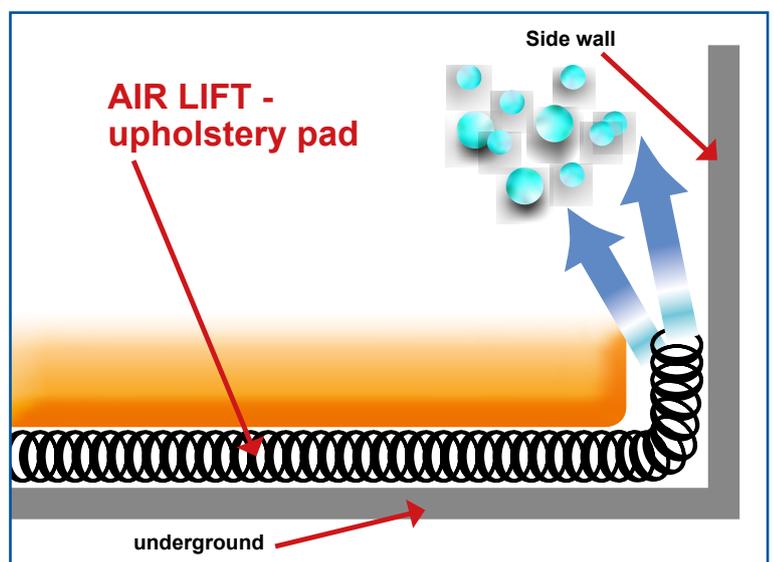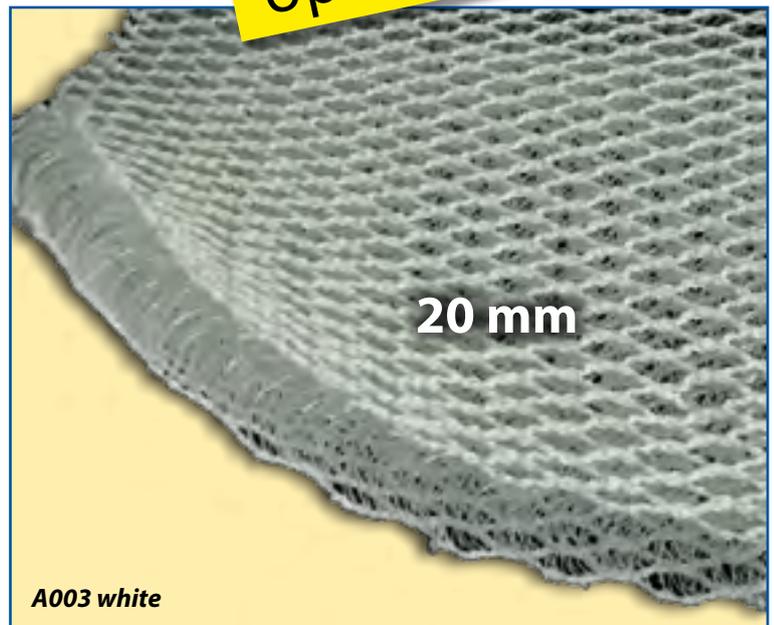

ISOTHERM mat

The optimal insulation material for your ship

The **ISOTHERM mat** is a closed-cell polyethylene foam and hardly absorbs any water (less than 4%). Due to its low thermal conductivity (approx. 0.038 W / mK at 0 °C - DIN 52612), the **ISOTHERM mat** is the ideal wall and ceiling insulation. The volume weight is approx. 32 kg / m³. The internal heat generated is retained, preventing cooling down during the night.

The **ISOTHERM mat** is temperature resistant from - 40 °C to approx. + 95 °C.

The gluing of the **ISOTHERM mat** on different surfaces (e.g. wood, GRP, metal) is just as easy as the subsequent cladding with textiles, artificial leather, wood etc.

We recommend our solvent-free UNI glue 140.

Areas of application:

Boat, yacht and shipbuilding,
Caravan equipment.

Properties

- Temperature resistance from -40 °C to approx. + 95 °C
- Thermal conductivity approx. 0.038 W / mK at 0 °C - DIN 52612
- closed-cell, hardly absorbs water (less than 4 %)
- durable
- for sandwich construction

Composition


- Material 100% PE foam
- Weight approx. 32 kg / m³
- Color anthracite / black

Dimensions

- Thicknesses 5 mm, 10 mm and 20 mm
- Format approx. 200 cm x 100 cm
- Delivery from 1 pc.


Processing

The ISOTHERM mat can be glued to almost all surfaces such as wood, GRP, metal with our solvent-free **UNI-Glue 140**. For thicknesses 5 and 10 mm, we recommend applying adhesive on one side; for thicknesses of 20 mm, it should be applied on both sides (contact bonding). The mats are simply cut to size with a craft knife. The ISOTHERM mat can be deformed and also welded with heat (hot air gun).

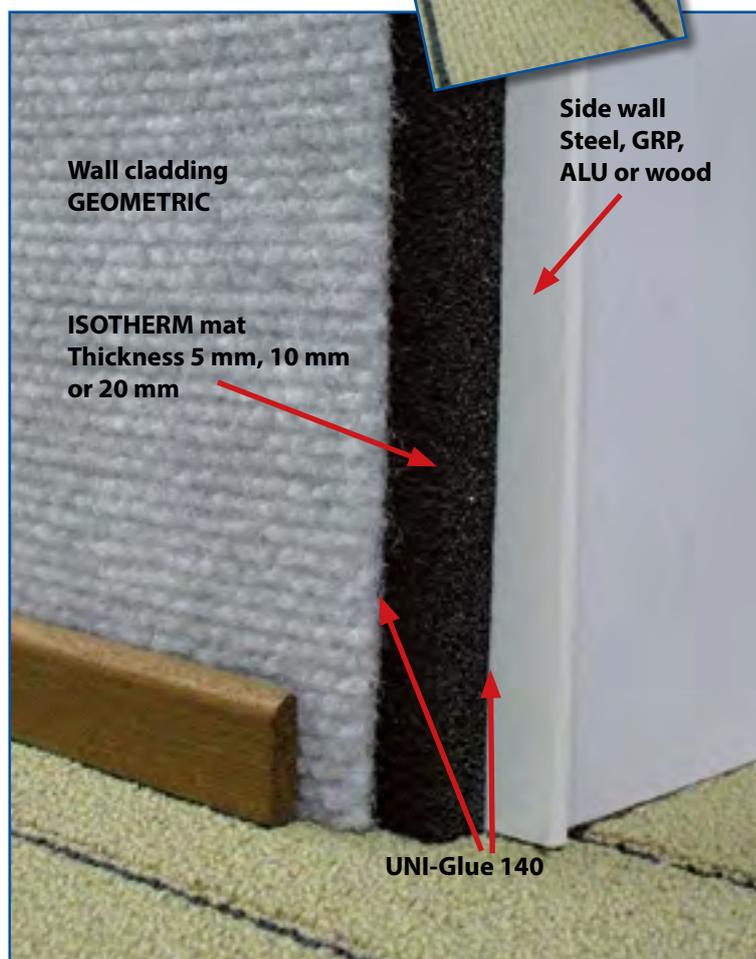

UNI-Glue 140

The **UNI-Glue 140** is a self-crosslinking aqueous synthetic resin dispersion mixed with natural resins (free from solvents). The special adhesive is suitable for the permanent bonding of artificial leather, foams, wall and ceiling coverings as well as insulating materials. It adheres to surfaces such as wood, GRP and protected steel, or sheet metal.

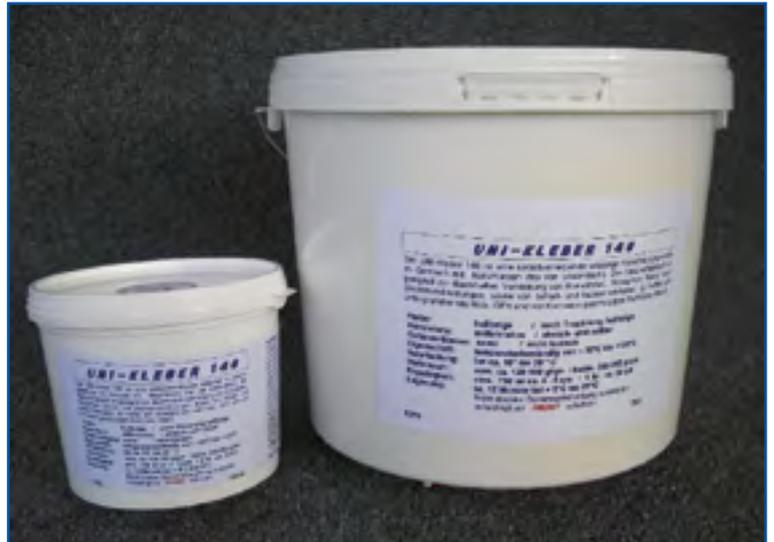

Properties

- **Color:** light beige - white / transparent to brownish after drying
- **Consistency:** medium viscosity / can be brushed, rolled and troweled (2 mm teeth)
- **Hazard class:** none / non-toxic
- **Property:** temperature resistant from -30 °C to +120 °C
- **Consumption:** 120-150 g / m² on one side, 200-260 g / m² on both sides
- **Spreading rate:** 750 ml approx. 4-5 m² (**KL001**) / 5 ltr. approx. 30 m² (**KL002**)
- **Storage:** approx. 12 months at + 5 ° C to + 30 ° C
- **Delivery:** from 1 container (750 ml / 5,0 l)

Do not expose to direct sunlight, **protect against FROST!**

Processing

The parts to be bonded must be dry and free of dust, oil and grease. The UNI-Glue 140 is applied thinly using a brush or velor roller. The adhesive has no initial tack due to its water content. Depending on the substrate and the humidity prevailing at the time of application, the flash-off time is approx. 15 minutes. This is shorter at high temperatures and lengthened at low temperatures. Adequate ventilation during the drying time is essential so that the water can escape from the adhesive.

The right time is given when the painted surfaces change from whitish to transparent. The materials placed in the semi-damp adhesive bed can be corrected. The tighter the first contact pressure - the better the adhesion.

We recommend applying adhesive on both sides (contact bonding - allow the adhesive to dry completely) when processing insulating mats. It is important to ensure that the contact pressure goes sideways from the center in all directions in order to avoid air inclusions.

The tools can be cleaned with water immediately after the work has been completed. The hardened adhesive can be softened with ethyl acetate or denatured alcohol. (Attention: observe fire protection).

Our verbal and written advice should support your own work. They are non-binding advice - also with regard to any property rights of third parties - and do not release you from the need to conduct your own practical testing of the products for their suitability for the intended processes and purposes. Product descriptions do not contain any statements about liability for any damage. However, should liability come into question, this is limited to the value of the goods delivered and used for all damage.

We recommend our glue tub set or our velor roller for processing.





Sikaflex 291i (PU glue)

SIKAFLEX® 291i Marine is a stable 1-component polyurethane sealant that reacts to form an elastomer when exposed to atmospheric moisture. PU sealing and adhesive material for the watertight embedding of outdoor carpets and bonding of sound insulation panels to metal, GRP and wood.

Processing

Bonding of outdoor carpets, soundproofing panels. Sand the adhesive surface with sandpaper (80/100 grit). Remove sanding dust. Cut material. Cover the area to be glued with adhesive tape (masking tape) at the edges, cut open Sikaflex 291i film tube 600 ml and apply to the area to be glued with a 2 mm notched trowel. Lay in the covering within 30 minutes, press lightly and evenly, avoiding air pockets. Remove the adhesive tape from the edge and seal it with Sikaflex if necessary. Do not enter the area for at least 24 hours. Remove excess Sikaflex with nitro thinner.

Caution – do not dissolve processed material. Hardened Sikaflex can only be removed mechanically (filler, sand).

Properties

- Color light gray
- sea and fresh water resistant
- aging and weather resistant
- not corrosive, can be sanded
- low odor
- electrically non-conductive
- permanently elastic
- temperature resistant from –40 °C to +90 °C
- Processing temperature +10 °C to +35 °C
- Curing speed 1 mm / 12 hours
- Spreading rate 600 ml for approx. 1,5 - 2,0 m²

2-K-Glue Körapur

The 2-component adhesive **Körapur** is suitable for gluing deck coverings and PVC floors with good adhesion to aluminum, wood, GRP, rigid PVC, etc.

Technical specifications

Polyurethane, 2-component, solvent-free

- Processing temperature: +15 °C to +25 °C
- Usage temperature: –40 °C to +100 °C
- Mixture: 6: 1 by parts by weight
- Pot life: 90 minutes at +23 °C
- Consumption: approx. 500 g for 1 m²
Bonding with 0,3 mm application
- Container sizes: 1 kg (for approx. 2 m² of surface to be bonded) (**KL005**),
7 kg (for approx. 14 m² of surface to be bonded) (**KL006**)
- Colour: beige
- Storage: not below 10 °C, not longer than 12 months



Processing

Sand the adhesive surface with sandpaper (80/100 grit), remove sanding dust, cut the material to size. Cover the areas to be glued with adhesive tape (masking tape) at the edges, mix 2-component adhesive intensively until it has a uniform color. Apply adhesive to the surfaces to be glued with a 2 mm notched trowel. Lay in the covering within 90 minutes, press lightly and evenly, avoiding air pockets. Remove the tape from the edge. Do not step on surfaces for at least 10-36 hours, high temperatures shorten the setting time.

Further information and the current prices can be found on our website www.kaehne-bootsausstatter.de

Stencil film


For areas that are difficult to access in the boat, on yachts or in the caravan or when there are no old carpets, our **stencil film** is ideally suited for the creation of precisely fitting templates, according to which carpets or wall cladding are then cut. Handling is easy, the stencil film is tear-proof, free of distortion and cut-edge-proof.

Properties

- without delay
- tearproof
- cut edge resistant

Dimensions


- Width approx. 150 cm
- Delivery from 5 running meters

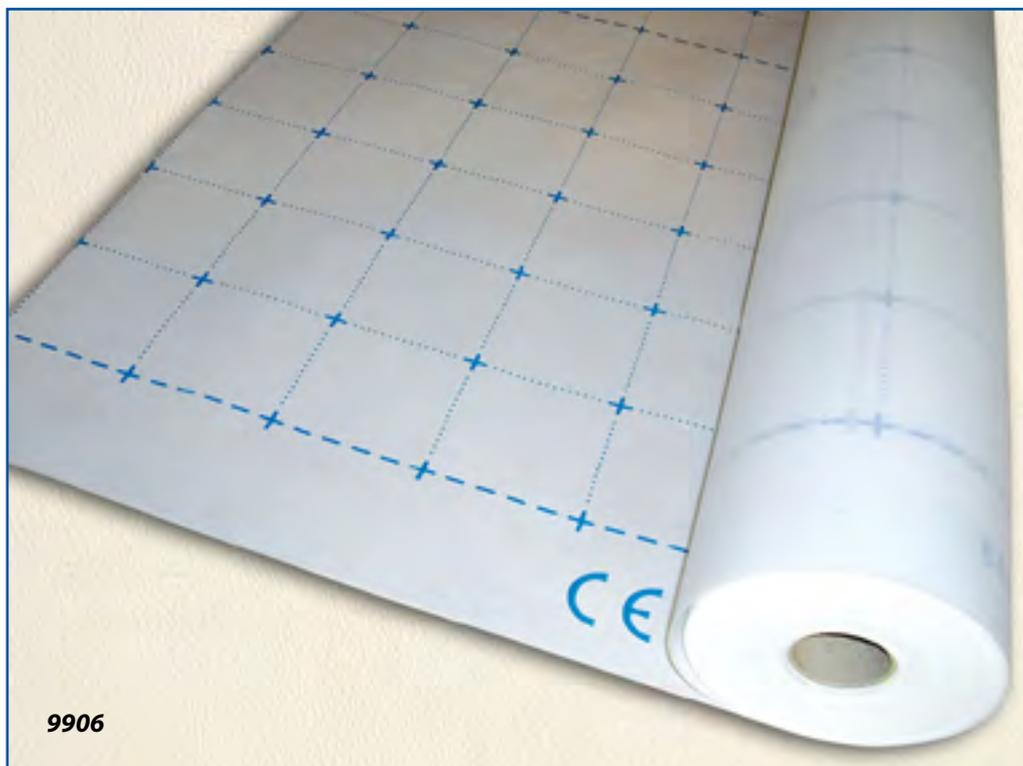

Create templates

Use a slightly stronger wrapping paper from the roll (please do not use light foil or wallpaper). Our stencil film, width 150 cm, length from 5.0 running meters, is better because it is warp-free and tear-resistant. Draw the shapes and cut the stencils 3-4 mm smaller all around. Then the positions of the push buttons are drawn in.

Mark the top and the bow side on each part. Please mark adjacent parts with a continuous line.

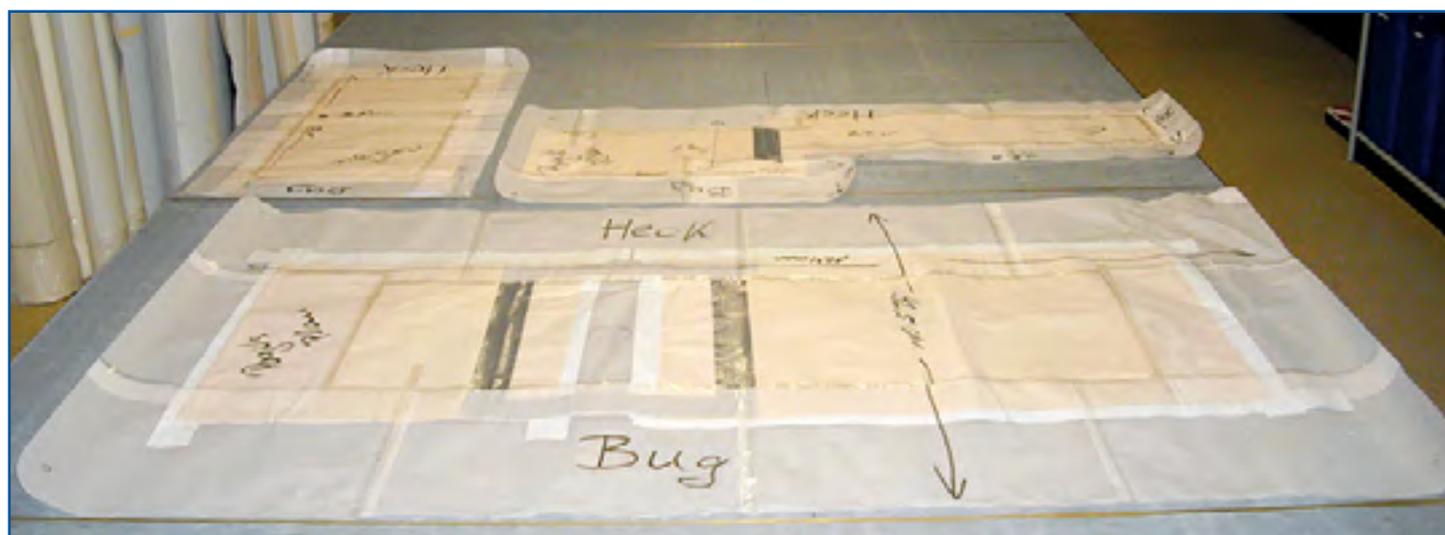

Cover rosette / Carpet ring

Ideally suited for neatly covering cut-outs in boat carpets that cannot be bordered. Easy to install, no fixed assembly required.



Properties stainless steel ring (9912)

- rust-free, V2A stainless steel
- for round tubes

Dimensions stainless steel ring

- Outer diameter 125 mm
- Inner diameter 60,3 mm
- Height 25 mm
- Delivery from 1 piece

Properties PVC ring (9911)

- PVC, black
- for round tubes

Dimensions PVC ring

- Outside diameter 90 mm
- Inner diameter 60 mm
- Delivery from 1 piece



9907



Snap fasteners, rustproof

Snap fasteners (rustproof), consisting of three parts, for fastening floor coverings in boats, yachts, caravans and caravans.

They are made up of the upper part, the middle part and the lower part and have a diameter of 15 mm. The snap fasteners are supplied without fastening screws.

Dimensions

- diameter 15 mm
- rustproof
- Delivery from 10 pieces

Objekt carpet binding

Objekt carpet binding is a hard-wearing carpet binding for indoor and outdoor use. It is UV stable, mold and dirt repellent and seawater resistant. **Objekt carpet binding** is available in 7 colors. When manufacturing boat carpets according to your wishes, we select the right color. Alternatively, you can define the color number yourself.

Properties

- mold and dirt repellent
- seawater resistant
- flame retardant (MVSS 302)
- UV-stable grade 7


Composition

- 100 % polyester

Dimensions

- Width 22 mm
- Delivery from 1 roll (45 m)


(When making carpets, only the necessary length is used and charged.)

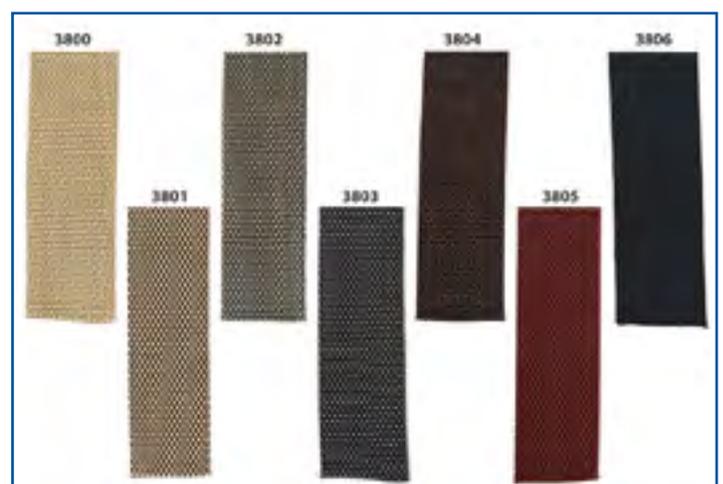

3800 beige




3801 sand



3802 light grey




3803 anthrazit




3804 brown



3805 red



3806 black



EQUIPMENT

9901



Glue tub set


consisting of a sturdy plastic tub for the glue and Velor roll with handle.

Also order:

- **Velor roll** (single)
oder
- **Set of 10 velor rolls**



9904

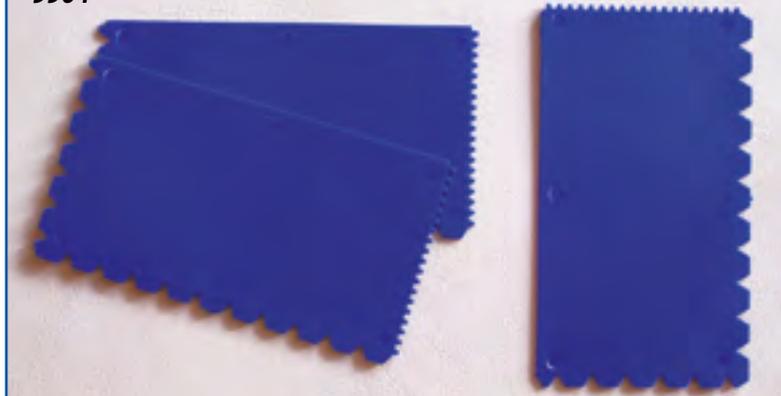

Plastic notched trowel

- 2 mm teeth
- approx. 8 cm x 14.2 cm
- for PU glue and 2-component glue application

9905



Metal notched spatula

- 2 mm teeth
- Handle approx. 14,5 cm
- length approx. 20 cm, width approx. 15 cm
- for PU glue or 2-component glue application



Voucher - The ideal gift

Are you looking for a suitable gift for your partner, relatives, acquaintances or friends? Give something everyone is happy about - a voucher with a free choice of products. The amount of the voucher - from 50,00 € - is up to you. The voucher is transferable and valid for 3 years.

Production according to your wishes and dimensions



We manufacture carpets in individual shapes for yachts, boats, caravans, etc. according to your specifications. A boat carpet is characterized by a special quality. These mainly include UV resistance, water resistance (also against salt water) and a high level of robustness. After all, the carpet should give you many years of pleasure.

We are happy to advise you on the selection.

Monday – Friday from 9 a.m. to 4 p.m. – ☎ **033055 - 2 29 81**

In order to be able to provide you with an offer, we need the following information:



Place the individual old coverings in the way they actually lie against each other.

Take a picture of this as a whole.

Now please enter the width and length dimensions of the individual parts. If the new flooring is to have a rod deck look, please also draw in the direction of the stripes or mark the bow side.



Indicate whether, or how many, snap fasteners should be incorporated (the number of pieces is sufficient for the time being).

We can chain around your coverings with loop tape (for indoor areas) or with a UV-resistant, tread-resistant tape (for outdoor and indoor areas).



UV-resistant Objekt carpet binding

Note: Each carpet is an individual custom-made product. When manufacturing from old carpets, there are slight deviations from the original due to production. When processing press studs, the lower part may therefore have to be repositioned or screwed in the boat. We recommend that you close the old hole beforehand with sealing compound and put the lower part of the new push button again.

Create templates

Use a slightly stronger wrapping paper from the roll (please do not use light foil or wallpaper).

Upon request, we can provide you with **stencil film**. Draw the shapes and cut the stencils 3-4 mm smaller all around. The positions of the push buttons are shown below.

Mark the top and the bow side on each part. Please mark adjacent parts with a continuous line.

If you like our offer, send us the old coverings or the prepared templates.

We also need from you:

- Specification of the covering of your choice,
- Your address with telephone number. and email address.



Due to the large number of boat types and the different series, we do not have any templates.

Further information and the current prices can be found on our website www.kaehne-bootsausstatter.de

GENERAL TERMS AND CONDITIONS OF SALE, DELIVERY AND PAYMENT

1 General

- 1.1 The following regulations apply to all orders (deliveries) between us and the respective customer, regardless of whether the customer is a consumer or an entrepreneur.
- 1.2 A consumer is a person who concludes a legal transaction for purposes that serve his business or that is attributable to the consumer's self-employed activity. Any deviating general terms and conditions of the consumer or other conditions of the consumer that deviate from these are neither recognized nor are they part of the contract; these are expressly contradicted.

2 Offers

- 2.1 Our offers are subject to change and non-binding. Declarations of acceptance and all orders require our written or telex confirmation to be effective. The same applies to additions, changes and ancillary agreements that were made before or when the contract was concluded.
- 2.2 Our employees are not authorized to make verbal subsidiary agreements or to give verbal assurances that go beyond the content of the written contract. Any agreements must therefore always be clarified in advance in writing.
- 2.3 Sample deliveries
Each customer can order up to 3 samples once free of charge. We charge 2.00 euros for each additional sample.

3 Prices

- 3.1 Unless otherwise stated, our prices are in euros ex warehouse / factory plus the applicable value added tax and any freight and packaging costs that may be required.
- 3.2 In the case of goods that we ourselves obtain from third parties, we may increase the prices appropriately if and to the extent that we ourselves are burdened with considerable increases in costs from the time the order is placed by the supplier.

4 Scope of delivery / assurances etc.

- 4.1 Information on dimensions, weight, color, material, equipment, etc. are only approximate, unless they are expressly guaranteed as binding in the order confirmation. Customary color deviations in the structure of the goods between samples and between individual deliveries and the delivered goods are unavoidable and do not constitute a defect.
- 4.2 Custom-made products are made according to the drawings and dimensions provided by the customer. He is solely responsible for the correctness of the given data.
- 4.3 When ordering by the meter between 1 m and 5 m, it will be sent in one piece. Orders longer than 5 m can be split into pieces. This does not apply to carpets up to 20 m in length.
- 4.4 A return of custom-made products, special orders and tailored goods is excluded insofar as the ordered goods do not correspond to the customer's specifications (size, etc.). If the goods therefore correspond to the customer's specifications, a complaint cannot be based on this. Furthermore, goods are not excluded from taking back goods that do not correspond to the quality that has been guaranteed or that is usually accepted and expected.

5 Delivery / transfer of risk / reversal

- 5.1 Unless otherwise agreed, delivery dates are non-binding and can only be regarded as approximate.
- 5.2 Delivery takes place at the expense and risk of the customer. The goods are only insured upon express request at the customer's expense. This also applies in any case if carriage paid delivery has been agreed.
- 5.3 If the goods are not accepted, the customer bears the costs incurred as a result.
- 5.4 Returns will not be accepted without our prior agreement and consent. This does not apply to returns due to the cancellation of the order.
- 5.5 By handing over the order to the respective means of transport / transport company, we have fulfilled our contractual service. The risk of accidental loss of the goods or any deterioration is therefore transferred to the customer from the time the goods are handed over to the means of transport / the transport company. However, the customer is free to prove to us that any damage to the goods is due to improper packaging.
- 5.6 Any guaranteed delivery times are extended in the event of force majeure, for example in the event of fires, strikes or government imports or export restrictions. In this case, we are entitled to withdraw from the unfulfilled contract in whole or in part if and to the extent that delivery

is not possible due to fires, strikes or government imports or export restrictions. In addition, deliveries are processed promptly in accordance with the order status and availability.

6 Payment terms

- 6.1 Unless otherwise agreed, new customers are required to pay in advance. The advance payment requirement also applies to existing customers, unless something else has been agreed with the existing customer in the context of the respective order.
- 6.2 At the time of the binding order and confirmation by us, an invoice will be sent to the customer for payment in advance. At this point in time, we are already preparing to ship the ordered goods.
- 6.3 If the customer is in arrears with a due payment, no further deliveries will be made, unless against advance payment.
- 6.4 If the customer is in arrears with his payment, we reserve the right to cancel the contract and / or to claim any costs of provision from the customer. This applies in particular to orders that are manufactured here separately and that have been specially processed at the customer's request (cuts, etc.).

7 Retention of Title

- 7.1 We retain ownership of all goods delivered by us until payment has been made in full, unless prepayment has been made in accordance with the contract.
- 7.2 The customer must notify us immediately of any seizure of the goods in the event of a possible advance payment by us.
- 7.3 As long as the retention of title exists, resale is only permitted in the ordinary course of business. The customer assigns his claims from the sale of the goods purchased under retention of title to us in the amount that corresponds to the value as shown on the invoice. The same applies to the buyer in the event of destruction or damage to the reserved goods in the event of an insurance claim.

8 Warranty / revocation

- 8.1 The delivered goods (also in the case of partial deliveries) must be examined immediately. It is deemed to be in accordance with the contract if and to the extent that recognizable defects are not reported to us in writing at the latest 5 working days after delivery or hidden defects are not reported to us in writing within a period of 5 working days immediately after their discovery.
- 8.2 In the event of an acknowledged complaint, we shall, at our option, provide a guarantee by repair or replacement within a reasonable period of time. If this fails twice, the customer can choose to either lower the price or cancel the contract. If the goods are further processed or resold in spite of recognizable defects, any claim to warranty or liability against us expires.
- 8.3 The partial removal of individual products (in the case of containers, etc.) by the customer is deemed to be approval of the entire delivery of this product (containers, etc.)
- 8.4 Reasonable deviations in size and strength as well as in the delivered quantities do not entitle to notices of defects and claims. Charged will be the amount sent.
- 8.5 In the case of a delivery of a set of goods, any revocation in case of doubt refers to the entire delivery. A partial redemption or a partial revocation are in any case excluded.

9 Data protection

- 9.1 The customer agrees that his personal data provided to us in the context of the business relationship will be stored and processed in our EDP.

10 Applicable law, place of jurisdiction

- 10.1 The law of the Federal Republic of Germany applies to the legal relationship between the customer and us. The applicability of the international sales law is excluded.
- 10.2 The place of jurisdiction for all legal disputes arising from business relationships is Oranienburg for merchants

11 Partial ineffectiveness etc.

- 11.1 Should individual provisions of these general terms and conditions be or become ineffective, the remaining provisions shall not be affected in their effectiveness.

Stand 04/2021

About us

A. Kähne Bootsasstatter - a well-established name in boat equipment as well as in the yacht and caravan sector

In 1984 a retail trade for boat equipment was founded in Berlin and this was expanded to include textiles in 1992. From the initially small textile program, a global wholesaler and retailer developed over time. In 2008 the mail order business was relocated to Sommerfeld, northwest of Berlin.

By working with high-performance partners who use modern manufacturing processes, we develop high-quality products such as breathable or water-repellent wall and ceiling coverings.

The fabrics and textiles in the outdoor and boat sector in particular have to be durable, mold-tested and weather-resistant. Our many regular customers testify to the quality of our products.

Artificial leather, upholstery and special carpets are also part of our range, as are soundproofing and insulating materials.

The proven AIR LIFT air mat against damp cushions and solvent-free adhesives round off our program.

We present our range of textiles at the leading boat shows in Düsseldorf and Tulln in Austria.

Our sales and our quality standards

We mainly sell textiles, insulation materials, synthetic leather and floor coverings for a wide range of applications in boat and caravan construction.

A high quality standard and a large selection of different materials are the basis for putting together our range.

Our customers include processing companies, shipyards, dealers and private individuals.

By the way - our goods are mainly manufactured in Germany, which means that we contribute to maintaining jobs.



NOTES FOR YOUR INQUIRY OR ORDER

Upon request, we can send you up to 3 samples once within Germany free of charge. We charge 2.00 euros for each additional sample. (There are additional postage costs for international deliveries.)

For your order, please enter your details in the contact form on our website.
In the field of concern - the article description, order no. , Specify color and quantity (m, m² or pieces).
You can also order many products directly from our online shop.

Production-related color deviations and technical changes do not represent a defect if the usage properties are retained.

For printing reasons, the colors shown may differ from the original. The images are mostly reduced in size.

Reprints, including excerpts, as well as the production of photographic reproductions are only permitted with express permission and with precise reference to the source.

Flooring outdoor

- ART-Deluxe
- INFINITY
- SPECTROPILE
- SUN
- POLI-DECK Classic
- POLI-DECK
- TRENDI
- POLIGRAS
- POLI-FIX

Flooring indoor

- MILANO
- CARAT
- ROMERA
- FLEX-Line

Boat bootom surfaces

- ART-Line / ART-Line UNI / ART-Line Forte
- NAUTISLIP
- NAUTIPUR

Artificial leather

- SATINO
- LAGUNA
- KARIBIK
- ALCANTE

Upholstery fabrics

- ALCANTARA
- MICROSA
- AMERA
- SARIA
- TINOS
- RHODOS

Insulation

- AIR LIFT - Luftmatte
- AIR LIFT - Carbon
- AIR LIFT - Stop
- AIR LIFT - Comfort
- ISOTHERM-Matte

Wall and ceiling textiles

- SANDORA
- DILANA
- GEOMETRIC
- GEOFLEX
- TAMARA
- PERLA
- PATERMO
- LAGUNA-Plus
- KARO gesteppt
- KARO geschweißt
- KARO
- STRUKTURA

Glue

- UNI-Glue 140
- 2-K-Glue, Körapur
- Sikaflex 291i

Equipment

- Stencil film
- Cover Rosette / Carpet ring
- Snap fasteners, rustproof
- Objekt carpet binding
- Glue tub set
- Velor roll
- Velor roll Set (10-pack)
- Plastic notched trowel
- Metal notched spatula
- Voucher

Mounting rails

- PVC rails
- ALU rails



A. Kähne Bootsausstatter[®]
TEXTILE AUSRÜSTUNGEN



Pappelallee 20
16766 Kremmen OT Sommerfeld
Phone: +49 (0) 33055 - 22981

E-Mail: info@kaehne-bootsausstatter.de
Internet: www.kaehne-bootsausstatter.de

You can reach us by phone from Monday to Friday from 9 a.m. to 4 p.m. Please make an appointment to visit and collect goods in Sommerfeld.

Catalog 12/2021